



1000R

Neoprene Safety Seal for Double-Acting Doors

PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:

NOTES:



Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer Blend: Chloroprene and EPDM
Neoprene is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment
- ▶ Seals and Closes Gap at Heel of Double-Acting or Center Pivoted Doors
- ▶ 5", 10" or 16" Overall Widths Available - Specify

Finishes

1000RA Anodized Aluminum
1000RB Gold
1000RDKB Dark Bronze

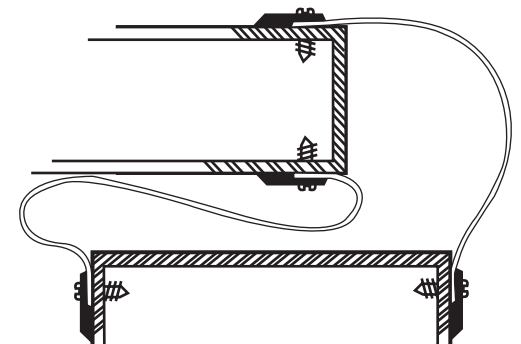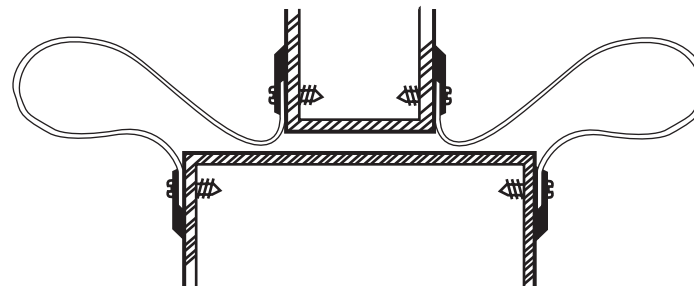

NGP-GKT-1000R-PCS-1220-A