



# T15N

## Neoprene Smoke-Rated Astragal Seal Set

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer EPDM

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -60°F to 250°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- ▶ Fire-Rated Astragal Seals Cannot Replace Any Astragal Required on the Door by the Door Manufacturer to Maintain Its Fire Label
- ▶ IBC, NFPA 80, NFPA105, and NFPA 252 Require the Gap at the Meeting Edge Between Fire Labeled Doors Must Not Exceed  $\frac{1}{8}$ "
- ▶ #6 x  $\frac{3}{4}$ " Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes are Slotted for Adjustment
- ▶ Provided as Two-Piece Set

#### Finishes

T15NA	Anodized Aluminum	Gray EPDM
T15NB	Gold	Black EPDM
T15NDKB	Dark Bronze	Black EPDM

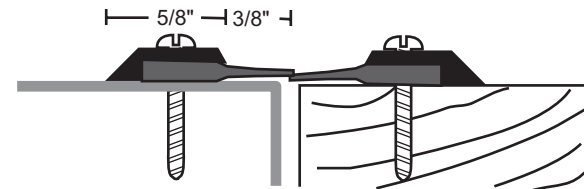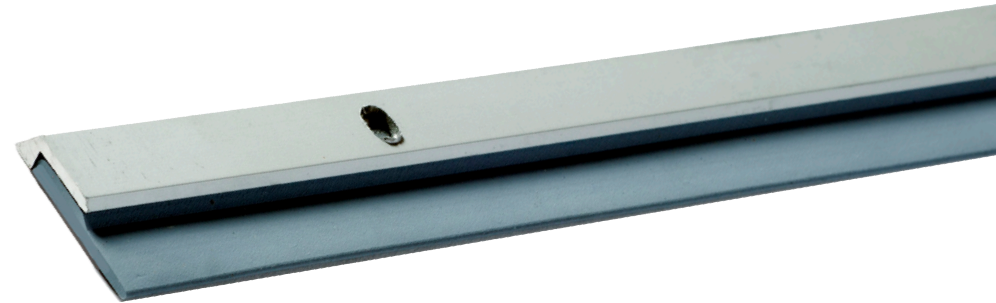

NGP-GKT-T15NSET-PCS-1220-A