



# 130SBR

Architectural Bronze Silicone Perimeter Seal

## PRODUCT CUT SHEET

### Material

Alloy CDA 385 (Copper Alloy No. C38500)  
Synthetic rubber polymer: Siloxane Closed Cell Sponge  
Silicone is Gray

- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Brass Plated SMS Furnished
- ▶ Screw Holes Slotted for Adjustment

### Finishes

Architectural Bronze Satin Finish (728), Similar to US4

### Options


- ▶ Polished (721), Suffix "POL"
- ▶ Dark Oxidized Oil Rubbed (722) Similar to US10B, Suffix DKB



**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

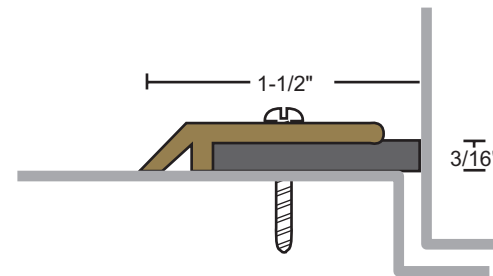

NGP-GKT-130SBR-PCS-0323-A

**ngp.com**  
1-800-NGP-RUSH