

# 1375

## Silicone Dense Bulb Seal

# PRODUCT CUT SHEET

## Material

Aluminum Alloy 6063, T5 Temper Synthetic Rubber Polymer: Siloxane Dense Silicone is Gray

- Excellent Flexibility and Memory
- Flame Resistant
- Moisture Resistant
- Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- ♦ #6 x ¾" Stainless Steel SMS Furnished
- Screw Holes Slotted for Adjustment

#### **Finishes**

137SA Anodized Aluminum

137SB Gold

137SDKB Dark Bronze













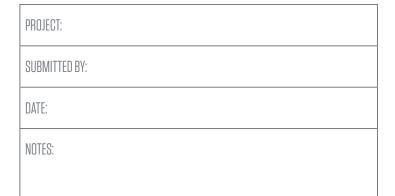





NGP-GKT-137S-PCS-1120-A

