



144S

Silicone Spring Adjustable Mortised Astragal Set

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer Blend: Siloxane
Silicone is Black

- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold and Air Infiltration
- ▶ Adjustment Screws on 10" Centers Allow Adjustment of the Seal without Repositioning Mounting Location
- ▶ Spring-Loaded to Maintain Constant Pressure for the Most Effective Seal
- ▶ Mortise Dimensions $\frac{9}{16}$ " Wide x $\frac{7}{8}$ "
- ▶ #8 x $\frac{3}{4}$ " SMS Furnished
- ▶ Provided as Two Piece Set

Finishes

144SA Anodized Aluminum
144SDKB Dark Bronze

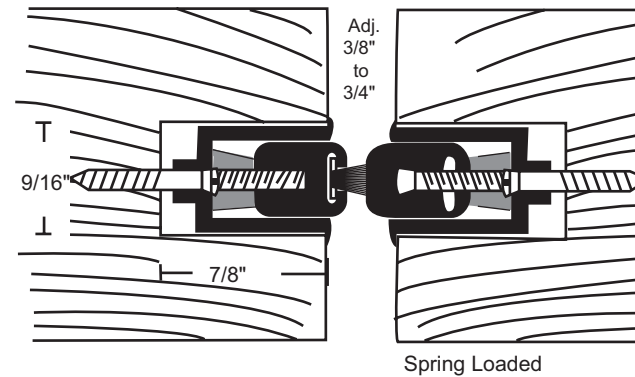

NGP-GKT-144S-PCS-0323-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH