


# NGFP T50

Aluminum  
Perimeter  
Bulb Seal



# SEAL



**BHMA**  
CERTIFIED



See [ngpp.com](http://ngpp.com) for All Applicable  
Certifications for this Product.

POSITIVE PRESSURE TESTED GASKETING MATERIALS  
FOR FIRE DOORS FOR APPLICATION TO HOLLOW-  
METAL-TYPE FIRE DOORS RATED UP TO 3 HOURS AND

WOOD-TYPE FIRE DOORS RATED UP TO 1½ HOURS.  
CATEGORY H. (CATEGORY H APPLIES TO SILICONE  
AND NEOPRENE ONLY)

SILICONE AND NEOPRENE ARE SMOKE AND  
DRAFT CONTROL GASKETING (CATEGORY H)  
TESTED TO UL 1784; MEETS REQUIREMENTS  
OF NFPA 105, IBC FOR USE ON "S" LABEL  
DOORS.


- Aluminum Alloy 6063, T5 Temper
- Flame/Moisture Resistant
- #6 X ¾" Stainless Steel Sheet Metal Screws Furnished

**ngpp.com**  
**1-800-NGP-RUSH**

---

# INSTALLATION INSTRUCTIONS

---

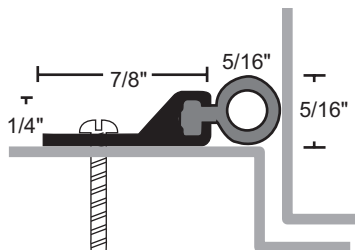

## 160

1. Cut seal to fit.
2. With door closed, position seal, Mark screw holes.
3. Drill pilot holes for screws using a  $\frac{7}{64}$ " drill bit.
4. Install with screws provided in all mounting holes, working from one end to the other.
5. Adjust position so that gasket is slightly compressed against door but does not impede proper closing and latching.



[ngp.com](http://ngp.com)

1-800-NGP-RUSH

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706