



160U

Polyurethane Seal

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Polyurethane is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -65°F to 175°F
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment

Finishes


160U Mill Aluminum
160UA Anodized Aluminum
160UB Gold
160UDKB Dark Bronze

Options

FATT - Fast Attach Tape



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

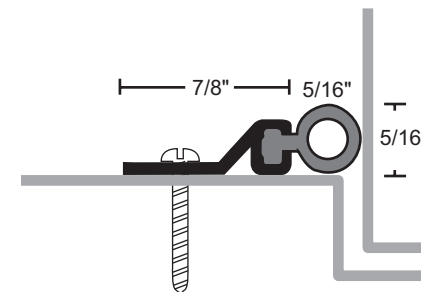

NGP-GKT-160U-PCS-1120-A