

## NGP-Edge® Sealing Systems - Category 'G' Classified

NGP Intumescent materials are formulated to expand at 375°F to 400°F up to 8-10 times their original thickness; completely sealing the gap around and between doors during a fire.



- 9800B** Brown
- 9800C** Charcoal
- 9800W** White

Intumescent with Protective Skin

Available in 17', 21' and 150' rolls

Self-Adhesive

See adhesive specifications on page G9



### Intumescent Fire Seal

#### Perimeter Application:



**20, 45, 60, 90 minute rated category B wood doors up to**

single swing 4'0 x 9'0

pairs 8'0 x 9'0


#### Meeting Edge Application up to 8'0 x 9'0 pairs of category B wood doors:



**20 Minute rated with single strip installed**



**45, 60 Minute rated with two strips installed**




- 9500** Gray
- 9500DKB** Brown

Intumescent with PVC cover

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

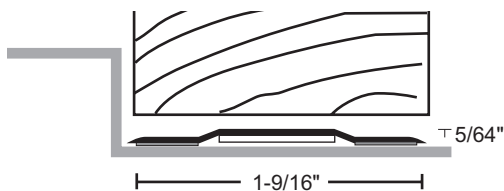

### NGP-Edge® Intumescent Fire Seal




**20, 45, 60, 90 minute rated category B wood doors up to:**

single swing 4'0 x 9'0, perimeter application

pairs 8'0 x 9'0, perimeter/meeting edge

U.S. Pat. DES 417,739



1/8" clearance required between doors and between door and frame