


## Nylon Brush Seals

**Properties:**


- Synthetic polymer: Polyamide
- Excellent abrasion resistance, flexibility and memory
- Moisture resistant
- Retains insecticides well
- Temperature range -70°F to 425°F
- BHMA Certified to ANSI/BHMA A156.22 performance tests for Heat, Cold, Air Infiltration and Smoke Infiltration in most common profiles as indicated by BHMA Certified symbol
- REACH and RoHS compliant
- Not effective against water penetration

#6 x 3/4" Stainless Steel Sheet Metal Screws furnished  
Screw holes slotted for adjustment


- A** - anodized aluminum with gray brush
- B** - gold with black brush
- DKB** - dark bronze with black brush
- no suffix** - mill aluminum with gray brush




**A626A**  
**A626B**  
**A626DKB**



**A625A**  
**A625B**  
**A625DKB**




**F625A**  
**F625B**  
**F625DKB**





**I-624A**  
**I-624DKB**




**603A**  
**603DKB**

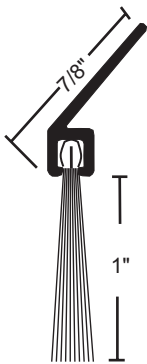


**602A**  
**602DKB**




**D648**  
**D648DKB**

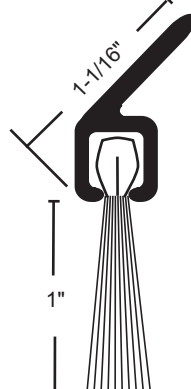

**D620A**  
**D620B**  
**D620DKB**

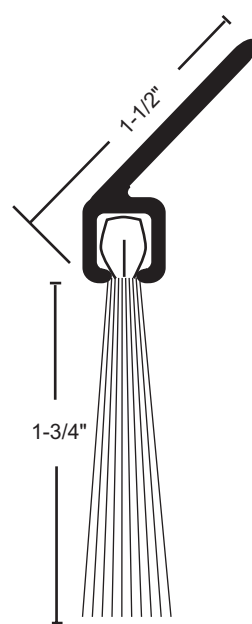

**G622A**  
**G622DKB**

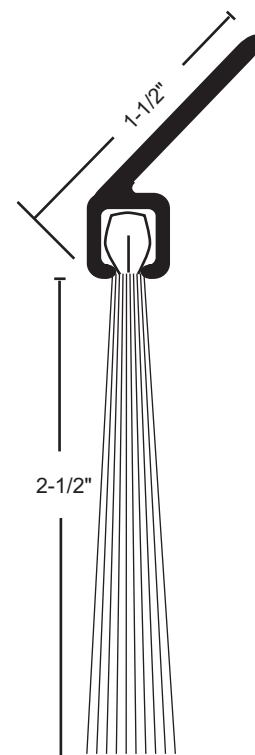

**H623A**  
**H623DKB**



\* up to 3 hours metal doors,  
1 hour wood doors.