

EXTENDED WIDTH & OFFSET

BUMPER SEAL THRESHOLDS

All Products On This Page



EXTENDED WIDTH BUMPER SEAL THRESHOLDS




884-6	1.10 lbs./ft.	
884-6DKB	1.10 lbs./ft.	6"
884-7	1.31 lbs./ft.	
884-7DKB	1.31 lbs./ft.	7"
884-8	1.52 lbs./ft.	
884-8DKB	1.52 lbs./ft.	8"



OPTIONAL: VINYL FOOT SEAL

Instead Of Caulk, Use the Optional Vinyl Foot Seal to Increase the Weather Resistance of the Threshold. Specify On Order.

OFFSET BUMPER SEAL THRESHOLDS

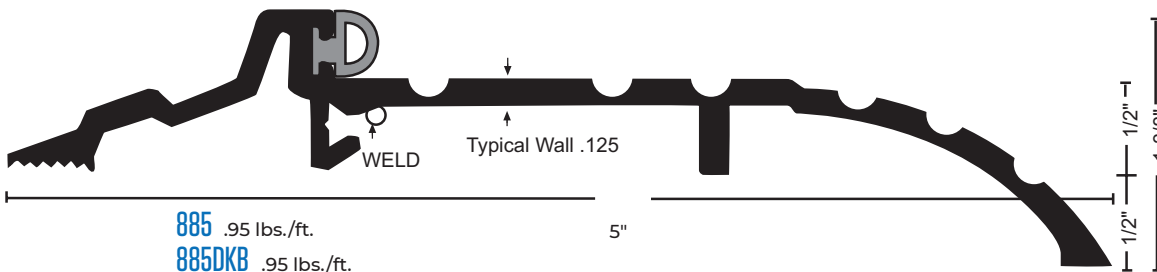

885	.95 lbs./ft.	
885DKB	.95 lbs./ft.	5"
885-6	1.16 lbs./ft.	
885-6DKB	1.16 lbs./ft.	6"
885-7	1.37 lbs./ft.	
885-7DKB	1.37 lbs./ft.	7"

MATERIALS & FINISHES

- Aluminum Mill
- DKB - Aluminum Dark Bronze



OPTIONAL: SIA: SLIP-RESISTANT FINISH

For use in Areas Where Conditions can be Hazardous and Safety is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



BUMPER SEAL

Provides Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** NGP-TPV
- S** Silicone
- P** Pile

**Vinyl ("V") Supplied Unless Other Material Specified