

## Extended Width Bumper Seal Thresholds

All thresholds this page




884-6	1.10 lbs./ft.	6"
884-6DKB	1.10 lbs./ft.	6"
884-7	1.31 lbs./ft.	7"
884-7DKB	1.31 lbs./ft.	7"
884-8	1.52 lbs./ft.	8"
884-8DKB	1.52 lbs./ft.	8"



**VINYL FOOT SEAL OPTION:**  
used instead of caulking to increase the weather resistance of the threshold. Specify on order.

## Offset Bumper Seal Thresholds

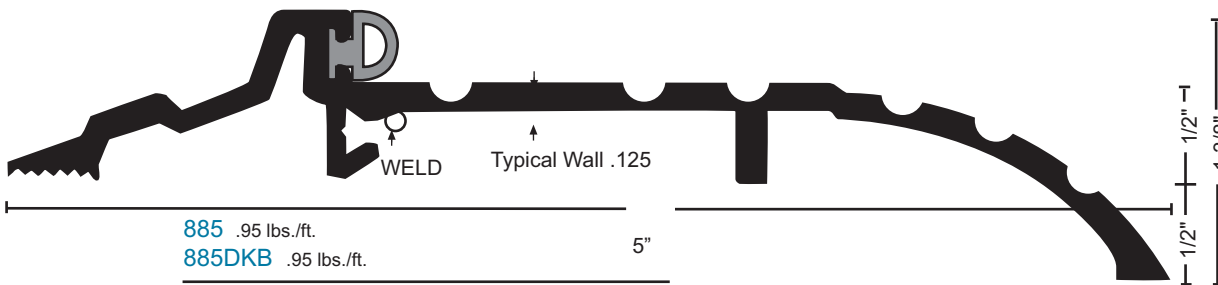

885	.95 lbs./ft.	5"
885DKB	.95 lbs./ft.	5"
885-6	1.16 lbs./ft.	6"
885-6DKB	1.16 lbs./ft.	6"
885-7	1.37 lbs./ft.	7"
885-7DKB	1.37 lbs./ft.	7"



### BUMPER SEAL

Seals against the door providing weather resistance

Vinyl ("V") supplied unless other material specified

Options:  
NGP-TPV ("N")  
Silicone ("S")  
Pile ("P")

### MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish

### FASTENERS

#10 x 1-1/2" FH zinc plated wood screws furnished. Dark bronze supplied with DKB thresholds.