


## Safety Tread Stair Nosings

- Non-slip abrasive tread material is a blend of carborundum and aluminum oxide, bonded and locked into the aluminum tread base.
- Treads exceed ADA requirements for coefficient of friction tested to ASTM F609 and MIL-D-23003A. The coefficient of friction for NGP stair nosings is .94 dry and .86 wet
- Furnished drilled and countersunk for screws, except 3231 and 3241 which have hook anchor designed for installation into wet concrete.
- Furnished standard with #14 x 1 1/2" stainless steel wood screws. Specify if other screws and anchors required.
- Stair nosings are manufactured to order and are non-cancelable and non-returnable.

### Renovation Nosings

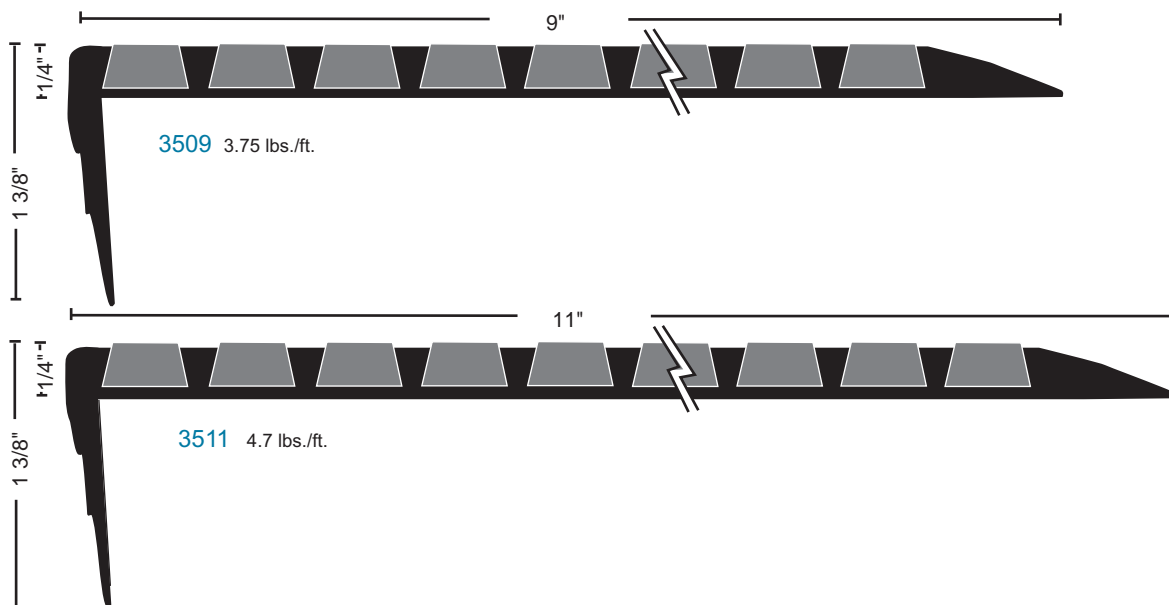

### Safety Nosings

- Designed for new construction: poured concrete, Terrazzo or Steel Pan cement filled stairs.
- Continuous hook anchor. Not drilled, no screws provided

