



# 220S

## Silicone Surface Automatic Door Bottom

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material

Aluminum Alloy 6063, T6 Temper  
 Synthetic Rubber Polymer  
 Silicone Is Black

- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 300°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1 ½"
- ▶ Minimum Length 11 ½", Maximum Length 60"
- ▶ ¾" Max Drop
- ▶ Steel End Caps Furnished Standard – Black Finish
- ▶ All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

#### Finishes


220SA Anodized Aluminum  
 220SDKB Dark Bronze

#### Options

Lead Insert Available for Radiation Shield – Specify 'Lead Lined'



Left-Hand Unit Shown

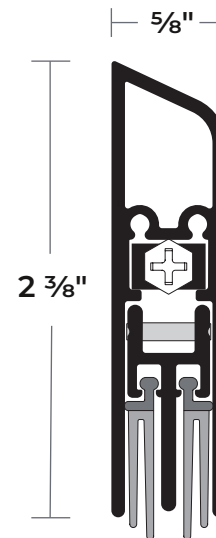

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
 Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

NGP-GKT-220S-PCS-0426-A

**ngp.com**  
 1-800-NGP-RUSH