



# 221SSS

## Stainless Steel Silicone Automatic Door Bottom

### PRODUCT CUT SHEET

#### Material

Stainless Steel Type 304  
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge  
Silicone is Gray

- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ Mounts on Push Side of Door
- ▶ Use With a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications where no Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and longer may be Cut up to 4" in the Field, under 36" should not be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

#### Finishes

Brushed #4 Finish (US32D, 630)

#### Options


1/16" Thick Lead Insert Available – Specify "Lead-Lined".



**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

|               |
|---------------|
| PROJECT:      |
| SUBMITTED BY: |
| DATE:         |
| NOTES:        |

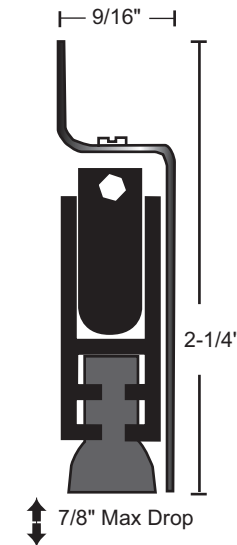

NGP-GKT-221SSS-PCS-0323-A

**ngp.com**  
1-800-NGP-RUSH