



# 223S

## Silicone E-Z Touch Automatic Door Bottom

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge  
Silicone Is Gray

- ▶ Excellent Flexibility and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -100°F To 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ The EZ-Touch Door Bottom Requires Only 3 to 5 Pounds of Pressure to Activate
- ▶ Perfect for Accessibility Applications and Still Provides an Effective Seal
- ▶ Available 23 1/4" Net to 48" in Length
- ▶ End Caps Furnished Standard
- ▶ 3/4" Max Drop

#### Finishes

223SA Anodized Aluminum  
223SB Gold  
223SDKB Dark Bronze

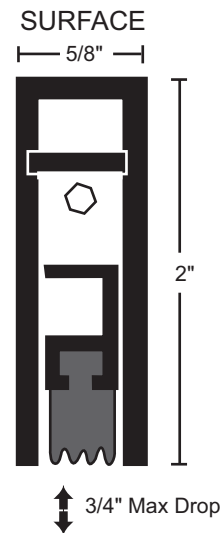

NGP-GKT-223S-PCS-1220-A