



229WHSS

Nylon Brush Stainless Steel Automatic Door Bottom

PRODUCT CUT SHEET

Material

Stainless Steel Type 304
Synthetic Polymer: Polyamide
Nylon Brush is Black

- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F to 425°F
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ ADB's from 12" to 18" can be cut down ½". ADB's 20" and over can be cut down up to 1½"
- ▶ Minimum Length 11½", Maximum Length 60"
- ▶ Stainless Steel End Caps Furnished Standard – #4 Brushed Finish
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ▶ ¾" Max Drop

Finishes


Brushed #4 Finish (US32D, 630)

Options

Lead Insert Available for Radiation Shield – Specify 'Lead Lined'



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

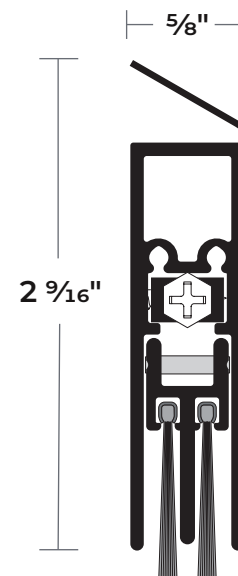

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

NGP-GKT-229WHSS-PCS-0426-A

ngp.com
1-800-NGP-RUSH