



310N

Neoprene Surface Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
 Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell
 Advanced Elastomeric Foam
 Color is Black


- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where no Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and Longer May Be Cut up to 4" in the Field; Under 36" Should Not Be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

Finishes

310NA Anodized Aluminum
 310NDKB Dark Bronze

Options

1/16" Thick Lead Insert Available –
 Specify "Lead-Lined"

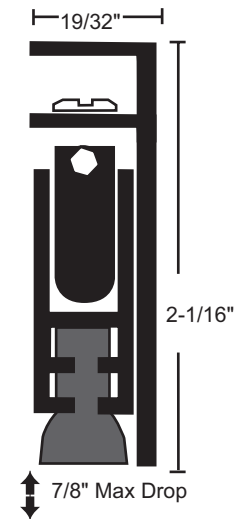

NGP-GKT-310N-PCS-0324-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH