



3231

Safety Tread Stair Nosing

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


Material

Aluminum Alloy 6063, T5 Temper

- ▶ 3" Wide ½" Tall
- ▶ Weight: 1.05 Lbs./Ft.
- ▶ Treads Exceed ADA Requirements for Coefficient of Friction Tested to ASTM F609 and MIL-D-23003A. The Coefficient of Friction for NGP Stair Nosings is .94 Dry and .86 Wet
- ▶ Designed for New Construction: Poured Concrete, Terrazzo or Steel Pan Cement Filled Stairs
- ▶ Continuous Hook Anchor Designed for Installation Into Wet Concrete
- ▶ Not Drilled, No Screws Provided
- ▶ Stair Nosings are Manufactured to Order and are Non-Cancelable and Non-Returnable

Finish

Mill Finish Aluminum With Black Carborundum and Aluminum Oxide Non-Slip Abrasive Tread

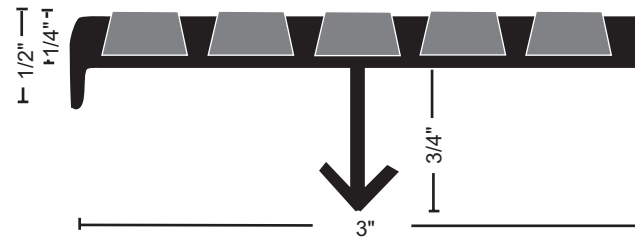

NGP-THR-3231-PCS-0223-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH