


The NGP logo consists of the letters "NGP" in a bold, blue, sans-serif font. The letters are contained within a white, shield-like shape with a pointed top and a slightly irregular bottom edge. This white shape is centered on a solid blue rectangular background.

325HD

Aluminum
Heavy-Duty
Half Saddle Threshold
 $\frac{1}{2}$ " x 5"



- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 5" Wide x $\frac{1}{2}$ " Tall
- ▶ Fluted Top
- ▶ BHMA Certified to ANSI/BHMA A156.21 10,000 Lb. Load Test
- ▶ Typical Wall Thickness: .250"
- ▶ Weight: 1.65 Lbs./Ft.
- ▶ #10 x $1\frac{1}{2}$ " FH Zinc Plated Wood Screws Included



BHMA
CERTIFIED

** When Installed with the Non-Beveled Edge Flush with Flooring, or Where No Greater Than $\frac{1}{4}$ " Vertical Rise Occurs*



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO $1\frac{1}{2}$ HOURS. CATEGORY J

ngp.com
1-800-NGP-RUSH


FAX: (800) 255-7874
QUOTES: quotes@ngp.com

11.24

THRESHOLD

INSTALLATION INSTRUCTIONS

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

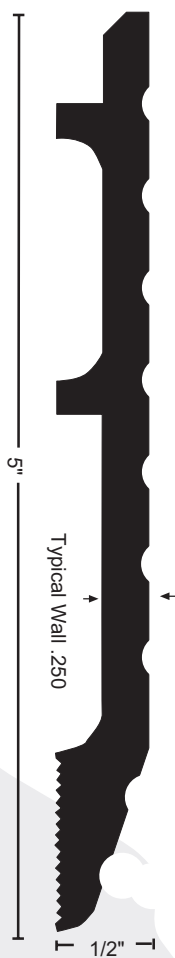

THE PRODUCTS
YOU COUNT ON
THE PEOPLE
YOU TRUST
ngp.com

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706