



# NGP

# 427E

Aluminum  
Saddle Threshold  
1/2" x 7"



- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 7" Wide x 1/2" Tall
- ▶ Fluted Top
- ▶ BHMA Certified to ANSI/BHMA A156.21 1,000 Lb. Load Test
- ▶ Typical Wall Thickness: .120"
- ▶ Weight: 1.13 Lbs./Ft.
- ▶ #10 x 1 1/2" FH Zinc Plated Wood Screws Included



**BHMA**  
CERTIFIED



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1 1/2 HOURS. CATEGORY J

**ngp.com**  
1-800-NGP-RUSH

FAX: (800) 255-7874  
QUOTES: quotes@ngp.com

8.24


# THRESHOLD

---

# INSTALLATION INSTRUCTIONS

---

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

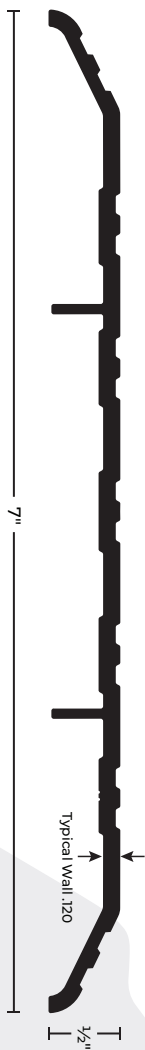

**NGP**

THE PRODUCTS  
YOU COUNT ON  
THE PEOPLE  
YOU TRUST

[ngp.com](http://ngp.com)

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

**NGP MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**

3689 Arrowhead Drive  
Carson City, NV 89706