5075

Self-Adhesive Silicone Seal



UL Tested and Certified for Fire and Smoke Doors

* Seals against smoke, fire, air, sound and weather
* Unaffected by sunlight, ozone and ultraviolet rays
* Excellent compression; door latches easily

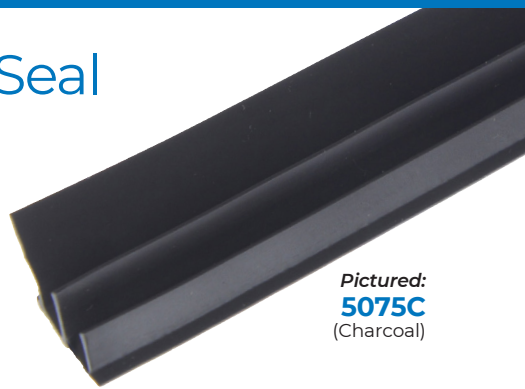

Pictured:
5075C
(Charcoal)

Made in USA

Installation Instructions

1. The recommended surface temperature of the frame must be between 65°F and 95°F for the adhesive to bond.
2. Clean frame with clean wipe provided to remove dust, oil, grease and dirt. Wax coated or high gloss painted surfaces may require roughening of the surface with a Scotch-Brite® pad or sandpaper so adhesive will properly bond.
3. Measure and pre-cut pieces to fit the head and jambs.
4. Remove protective backing 1 to 2 feet at a time.
5. Position on frame where illustrated, allowing approximately 1/16" between seal and frame for clearance when compressed.
6. Adhere by pressing firmly (approx. 15 lbs. pressure required) straight down along entire length of gasketing. Do not remove and relocate.
   WARNING: Do not rub along length from one end toward other end during installation as gasket will stretch and not adhere properly.
7. Make sure the seal does not impede proper closing and latching of the door.

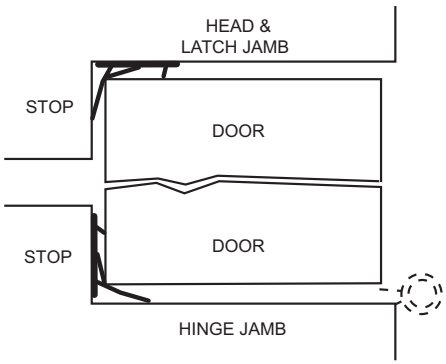

For STC application refer to STC Seal Set Cut-sheet for proper mounting position.

COLOR	LENGTH			
C - Charcoal	17'	21'	25'	300'
W - White	17'	--	--	--
CL - Clear	17'	21'	25'	--

STC 52

BHMA CERTIFIED

UL CERTIFIED SAFETY.UL.CA R10042

POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS.
CATEGORY H

STORAGE AND SHELF LIFE
The adhesive on this seal has a shelf life of one year stored at 75°F and 50% relative humidity or less

Smoke & draft control gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC for use on "S" label doors.

Scotch-Brite® is a trademark of 3M Company.

800-647-7874
ngp.com