



5075

TPE Triple Fin Smoke Seal

PRODUCT CUT SHEET

Material

Self-Adhesive Thermo-Plastic Elastomer (TPE)

- ▶ Good Abrasion Resistance
- ▶ Moisture-Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- ▶ Rigid Base with Flexible Elastomeric Fins
- ▶ Flame-Resistant
- ▶ Temperature Range -60°F To 275°F
- ▶ Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ▶ REACH and RoHS Compliant
- ▶ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year when Stored at 75°F and 50% Relative Humidity or Less
- ▶ 1/2" Wide x 3/8" Tall
- ▶ Available in 36", 48", 72", 84", 96" and 108" Lengths.
White only available in 36", 48", 84" and 96" Lengths




**Anti-Microbial Not Available in Clear*

Color

- 5075B Brown
- 5075C Charcoal
- 5075CL Clear
- 5075W White



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

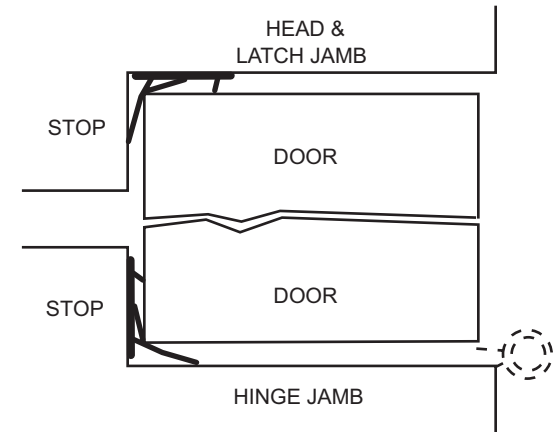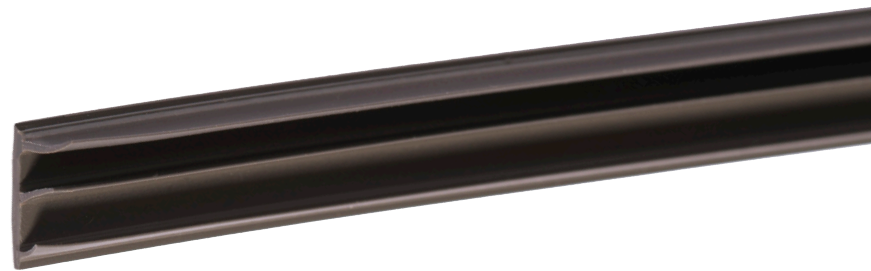

NGP-GKT-5075-PCS-0323-A

NGP MEMPHIS
 4985 East Raines Road
 Memphis, TN 38118
orders@ngp.com

NGP VEGAS
 4584 Calimesa Street
 Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
 1-800-NGP-RUSH