




# NGP

# 884

## Aluminum Bumper Seal Threshold



- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 5" Wide x 7/8" Tall
- ▶ BHMA Certified to ANSI/BHMA A156.21 1,000 Lb. Load Test
- ▶ Typical Wall Thickness: .172"
- ▶ Weight: 1.00 Lbs./Ft.
- ▶ #10 x 1 1/2" FH Zinc Plated Wood Screws Included. Dark Bronze Supplied with DKB Thresholds

**HD** (V) Vinyl Bumper Seal Standard  
Optional: (N) NGP-TPV  
(S) Silicone



**BHMA**  
CERTIFIED



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1 1/2 HOURS. CATEGORY J

**ngp.com**  
**1-800-NGP-RUSH**

FAX: (800) 255-7874  
QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

11.24


# THRESHOLD

---

# INSTALLATION INSTRUCTIONS

---

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

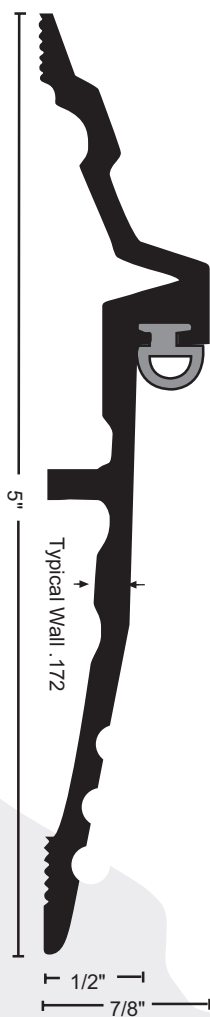

---

THE PRODUCTS  
**YOU COUNT ON**  
THE PEOPLE  
**YOU TRUST**  
[ngp.com](http://ngp.com)

---

FAX: (800) 255-7874  
QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)  
ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**  
3689 Arrowhead Drive  
Carson City, NV 89706