



# 9125

## Allseal® Smoke-Rated Astragal Seal Set

### PRODUCT CUT SHEET

#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge  
Silicone Plus is Tan

- ▶ Premium Grade Seals Specially Formulated to withstand Greater Temperature Extremes While Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Fire-Rated Astragal Seals Cannot Replace any Astragal Required on the Door by the Door Manufacturer to Maintain its Fire Label
- ▶ IBC, NFPA 80, NFPA105, and NFPA 252 Require the Gap at the Meeting Edge Between Fire Labeled Doors Must Not Exceed 1/8"
- ▶ #6 X 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment
- ▶ Order as Set to Receive Two Pieces

#### Finishes


9125A Anodized Aluminum  
9125B Gold  
9125DKB Dark Bronze



**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
orders@ngp.com

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
vegasorders@ngp.com

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

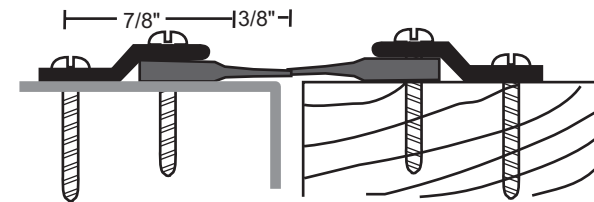

NGP-GKT-9125SET-PCS-0323-A

**ngp.com**  
1-800-NGP-RUSH