



9200

Self-Adhesive Intumescent Seal

For Excessive Clearance Between Door and Frame over $\frac{1}{8}$ ", up to $\frac{5}{16}$ ".

UL Certified for 20 Minute Fire Doors with Clearance up to $\frac{5}{16}$ ".

Installation Instructions

1. The surface temperature of the frame must be above 50°F for adhesive to bond.
2. Clean frame or door with provided wipe to remove dust, oil, grease, and dirt. Wax-coated or high-gloss painted surfaces may require roughening with a Scotch-Brite™ pad or sandpaper so adhesive will bond properly.
3. Measure and cut pieces to fit where seal is to be mounted.
4. Remove protective backing 1 to 2 feet at a time.
5. Position on frame or door where illustrated.
6. Adhere by pressing firmly (approx 15 lbs. pressure required) straight down along entire length of gasketing. Do not remove and relocate.
7. Make sure the seal does not impede proper closing and latching of the door.





POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY

For use on 20 minute UL10B and UL10C wood or hollow metal fire doors with head and or jamb clearance exceeding $\frac{1}{8}$ ", up to $\frac{5}{16}$ ".


An NGP strike shim 9275 or 9225 is also required for proper latchbolt engagement.

Hinge edge of category B wood doors require a UL certified category G edge seal.

2.24

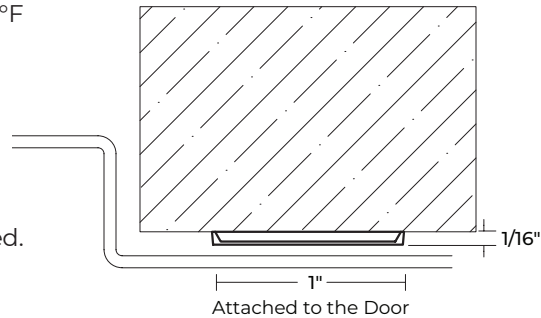

Attached to the Door

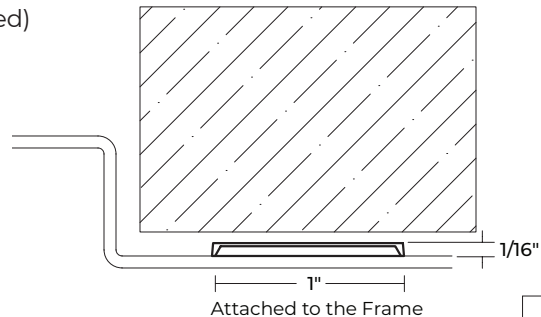

Attached to the Frame

STORAGE AND SHELF LIFE

The adhesive on this seal has a shelf life of one year when stored at 75°F and 50% relative humidity or less.

Made in USA

ngp.com
1-800-NGP-RUSH