



9245V

Intumescent Door Shoe with Vinyl Seal, Up to 1½" — 45 Minute

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Gap Solution for Excessive Fire Door Bottom Undercut/Clearance up to 45 Minutes
NGP-Edge® Intumescent Door Shoe.
UL Certified for Door Bottom Gaps — Measuring up to 1½".




UL CERTIFIED FOR USE IN THE US AND CANADA

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps
- ▶ Thermoplastic Polymer: Polyvinyl Chloride (PVC) Formulated with an Environmentally Friendly Bio-Based Plasticizer
- ▶ Moisture Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame Resistant
- ▶ Temperature Range 0°F to 140°F
- ▶ Oxidative Degradation From Age and Exposure to Cold, Heat and UV Causes Hardening, Loss of Memory and Resilience, Cracking, Crazeing and Discoloration
- ▶ Up to 45-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x ¾" Stainless Steel SMS Furnished
- ▶ Vinyl is Black

FINISHES:

- 9245VA Anodized Aluminum
- 9245VDKB Dark Bronze/Black Anodized

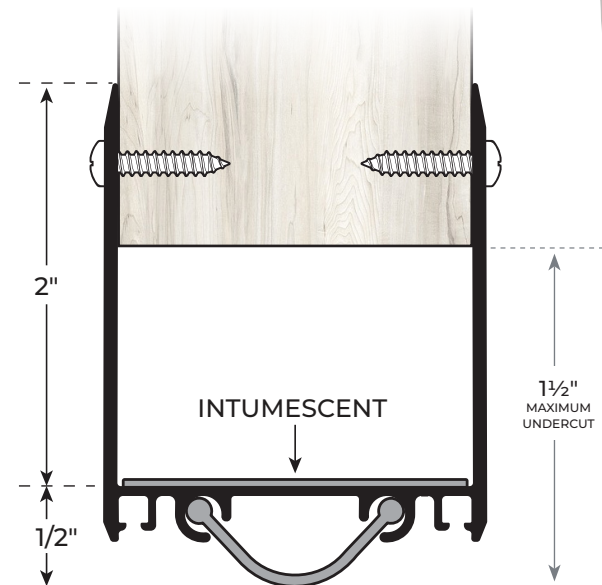

NGP-GAP-9245V-PCS-0126-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH