

9245V

FIRE DOOR SHOE WITH VINYL SEAL, GAP SOLUTION UP TO 1 1/2"




Gap Solution for Excessive Fire Door Bottom Undercut/Clearance up to 45 Minutes
NGP-Edge® Intumescent Door Shoe.
UL Certified for Door Bottom Gaps — Measuring up to 1 1/2".

- Restricts the Passage of Smoke
- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors, up to 45 Minutes
- Available in 36" and 48" Lengths (Can be Cut Down in Field)
- Non-Handed

PRODUCT CONSISTS OF:

- + Aluminum Alloy 6063, T5 Temper
- + Aluminum End Caps
- + Screw Holes Slotted for Adjustment
- + #6 x 3/4" Stainless Steel SMS Furnished
- + Vinyl is Black

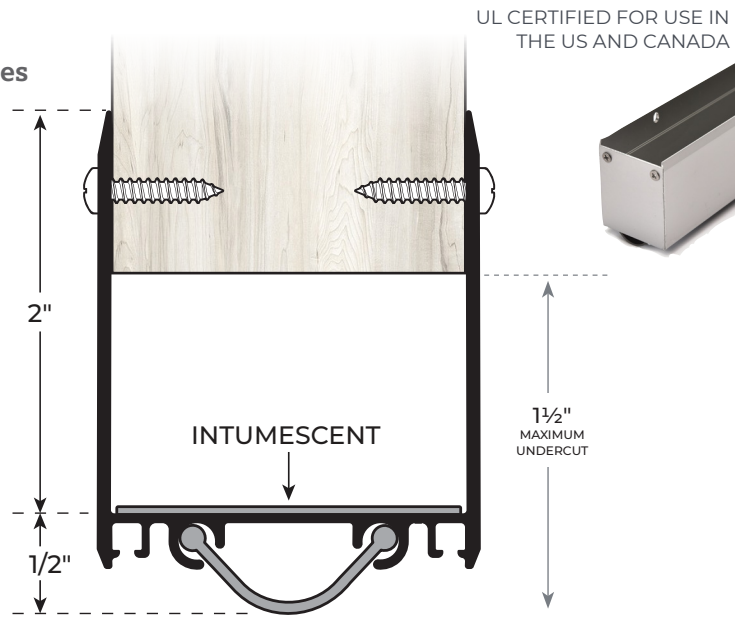

UL CERTIFIED FOR USE IN THE US AND CANADA



POSITIVE PRESSURE TESTED
 MISCELLANEOUS FIRE DOOR
 ACCESSORY

- 9245VA ANODIZED ALUMINUM
- 9245VDKB DARK BRONZE/BLACK ANODIZED

9245WH

FIRE DOOR SHOE WITH NYLON BRUSH, GAP SOLUTION UP TO 1 1/2"




Gap Solution for Excessive Fire Door Bottom Undercut/Clearance up to 45 Minutes
NGP-Edge® Intumescent Door Shoe.
UL Certified for Door Bottom Gaps — Measuring up to 1 1/2".

- Restricts the Passage of Smoke
- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors, up to 45 Minutes
- Available in 36" and 48" Lengths (Can be Cut Down in Field)
- Non-Handed

PRODUCT CONSISTS OF:

- + Aluminum Alloy 6063, T5 Temper
- + Aluminum End Caps
- + Screw Holes Slotted for Adjustment
- + #6 x 3/4" Stainless Steel SMS Furnished

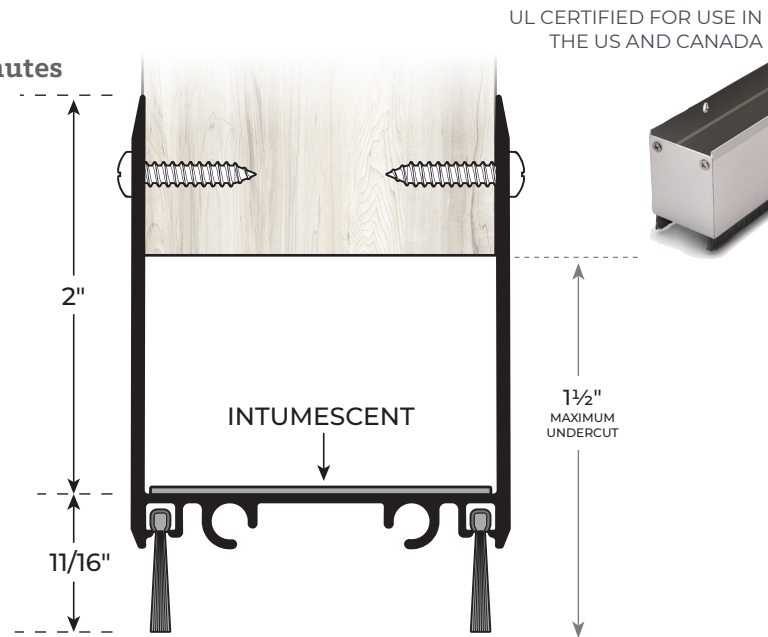

UL CERTIFIED FOR USE IN THE US AND CANADA



POSITIVE PRESSURE TESTED
 MISCELLANEOUS FIRE DOOR
 ACCESSORY

- 9245WHA ANODIZED ALUMINUM WITH GRAY BRUSH
- 9245WHDKB DARK BRONZE/BLACK ANODIZED WITH BLACK BRUSH