




957

ADA Compliant Interlocking Ramp 6" Wide x ¼" Tall

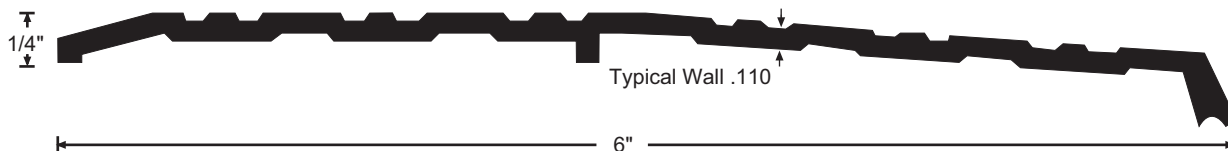

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 6" Wide x ¼" Tall
- ▶ BHMA Certified to ANSI/BHMA A156.21
1,000 Lb. Load Test
- ▶ Typical Wall Thickness: .110"
- ▶ Weight: .93 Lbs./Ft.
- ▶ #10 FH Zinc Plated Wood Screws Included



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS. CATEGORY J



**When Installed as Part of an Interlocking Ramp Assembly.*


ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: QUOTES@NGP.COM
ORDERS: ORDERS@NGP.COM

THRESHOLD

INSTALLATION INSTRUCTIONS

- 1. Assemble ramp by interlocking sections together.
- 2. Cut ramp to fit.
- 3. Position return closed end (if ordered) on each side of ramp.
- 4. Drill and counter sink screw holes in ramp aligned with holes in RCE.
- 5. Install ramp with screws provided.
- 6. Caulk around base of ramp and RCE for moisture control.

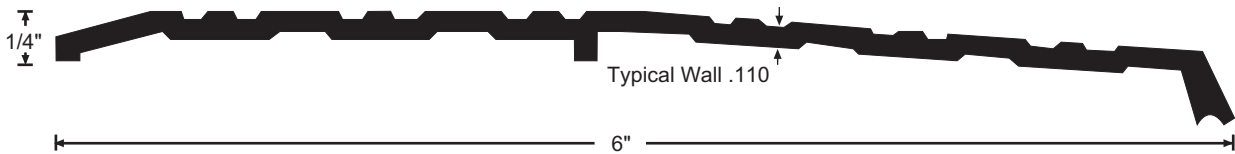

NGP
THE PRODUCTS
YOU COUNT ON
THE PEOPLE
YOU TRUST
ngp.com

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

