9590-2

FIRE DOOR BOTTOM GAP SOLUTION

UL CERTIFIED FOR USE IN
THE US AND CANADA

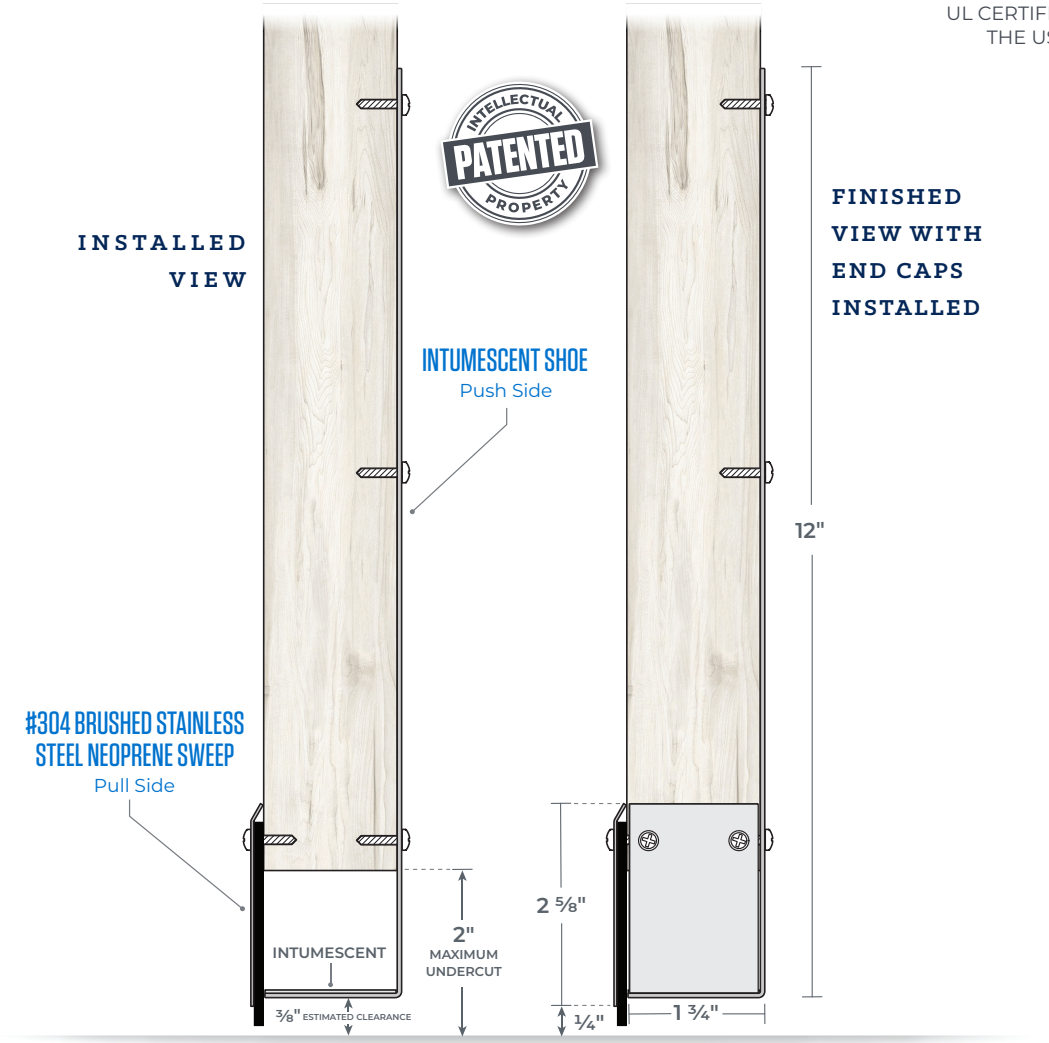

PRODUCT INFORMATION

UL Certified for Door Bottom Gaps — Measuring up to 2"

- Restricts the Passage of Smoke
- 180-Minute Rated on Hollow Metal Doors, 90-Minute Rated on Wood Doors
- For Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Available in 36" and 48" Lengths
- Furnished ½" Shorter Than Ordered. (i.e. 36" is Furnished 35 ½")
- Non-Handed
- Patented: US Patent US 11,873,679 B2

POSITIVE PRESSURE TESTED MISCELLANEOUS FIRE DOOR ACCESSORY

PRODUCT CONSISTS OF:

+ #304 Brushed Stainless Steel Neoprene Sweep— Pull Side
+ #304 Brushed Stainless Steel Intumescent Shoe—Push Side
+ #304 Brushed Stainless Steel End Caps
+ #6 × ¾" Stainless Steel SMS Furnished

Brushed stainless steel
Neoprene is black