


9595DKB

DOOR BOTTOM GAP SOLUTION

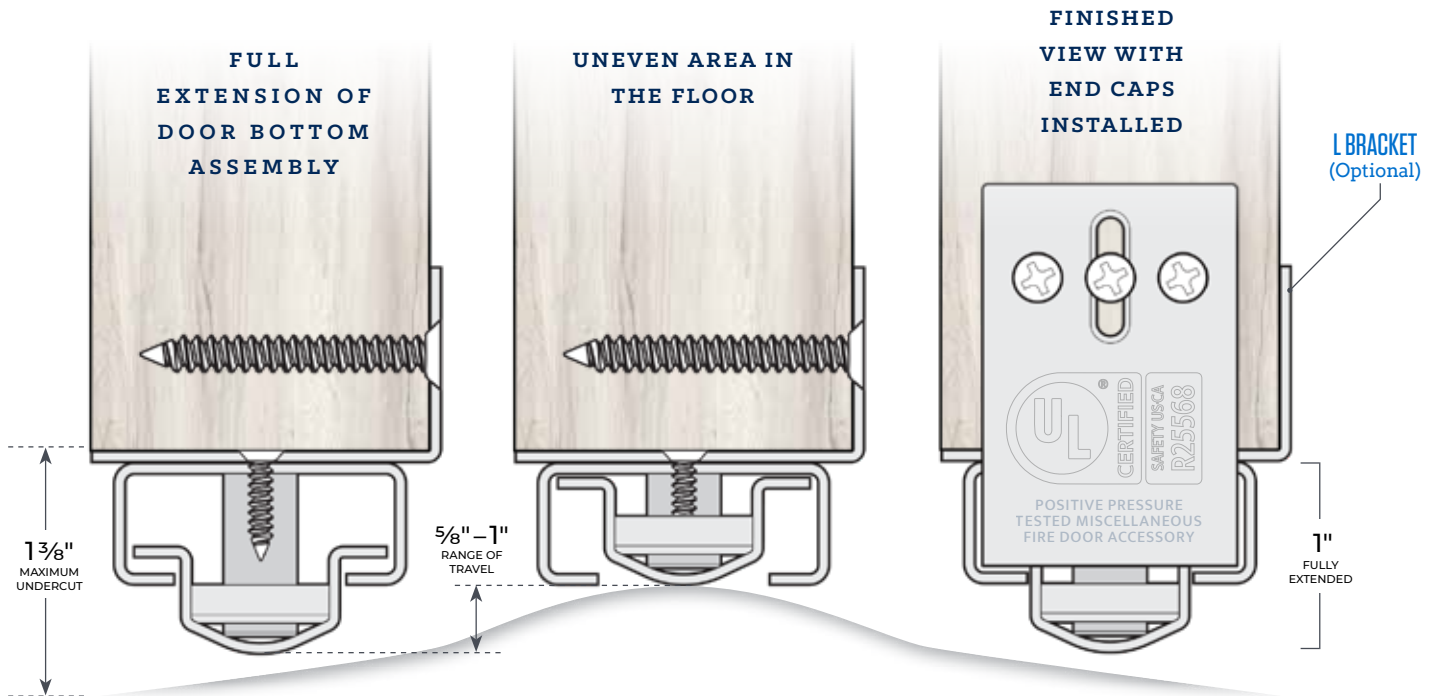

PRODUCT INFORMATION

UL Certified Solution for Fire Doors With Excessive Clearance Between the Bottom of the Door and Finished Floor, up to 1 3/8".

- ▶ Application Certified on both Hollow Metal and Wood Fire-Rated Doors, up to 90-Minutes
- ▶ Patent Pending
- ▶ Non-Handed
- ▶ L-bracket allows Installation while Door Remains on Hinges
- ▶ Field Trim to Fit: up to 1 1/2" per side, 3" total
- ▶ Designed to Travel Over Uneven Floors, with a range of 3/8"
- ▶ May be Fastened to the Underside of the Door's Bottom Rail to Minimize Visibility.
- ▶ End Caps Set Height Position and Provide a Finished Look
- ▶ Sizes: 36", 42" and 48"

PRODUCT CONSISTS OF:

- + L-Bracket, 16-Gauge Steel, Embossed with UL Mark
- + Door Bottom Assembly, 18-Gauge Steel
- + End Caps, 18-Gauge Steel, Embossed With UL Mark
- + Hardware Pack
 - #10 x 1 1/2" PHPH SS SMS (DKB)
 - #8-32 x 1 3/4" PHP SS Thru-Bolt (DKB)
 - #6 x 3/8" SS TEK
 - #10 x 2" PHPH SS SMS
 - #6 x 3/4" FHPH SS SMS (DKB)

Powder Coated, DKB