



9595DKB

Door Bottom Gap Solution

PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

UL Certified Solution for Fire Doors With Excessive Clearance Between the Bottom of the Door and Finished Floor, up to 1 3/8".




- ▶ Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90-Minutes
- ▶ Patent Pending
- ▶ Non-Handed
- ▶ L-bracket allows Installation while Door Remains on Hinges
- ▶ Can be Trimmed in the Field up to 1 1/2" per Side, 3" Total
- ▶ Designed to Travel Over Uneven Floors, with a Range of 5/8"
- ▶ Visibility of Hardware is Minimized by Using L-Bracket on Pull-Side of the Door
- ▶ May be Fastened to the Underside of the Door's Bottom Rail to Minimize Visibility
- ▶ End Caps Set Height Position and Provide a Finished Look

PRODUCT CONSISTS OF:

- + L-Bracket, 16-Gauge Steel, Embossed with UL Mark
- + Door Bottom Assembly, 18-Gauge Steel
- + End Caps, 18-Gauge Steel, Embossed with UL Mark
- + Hardware Pack:
 - #10 x 1 1/2" PHPH SS SMS (DKB)
 - #8-32 x 1 3/4" PHPH SS Thru-Bolt (DKB)
 - #6 x 3/8" SS TEK
 - #10 x 2" PHPH SS SMS
 - #6 x 3/4" FHPH SS SMS (DKB)
- ▶ Sizes: 36", 42" and 48"

FINISH:

Powder Coated, DKB

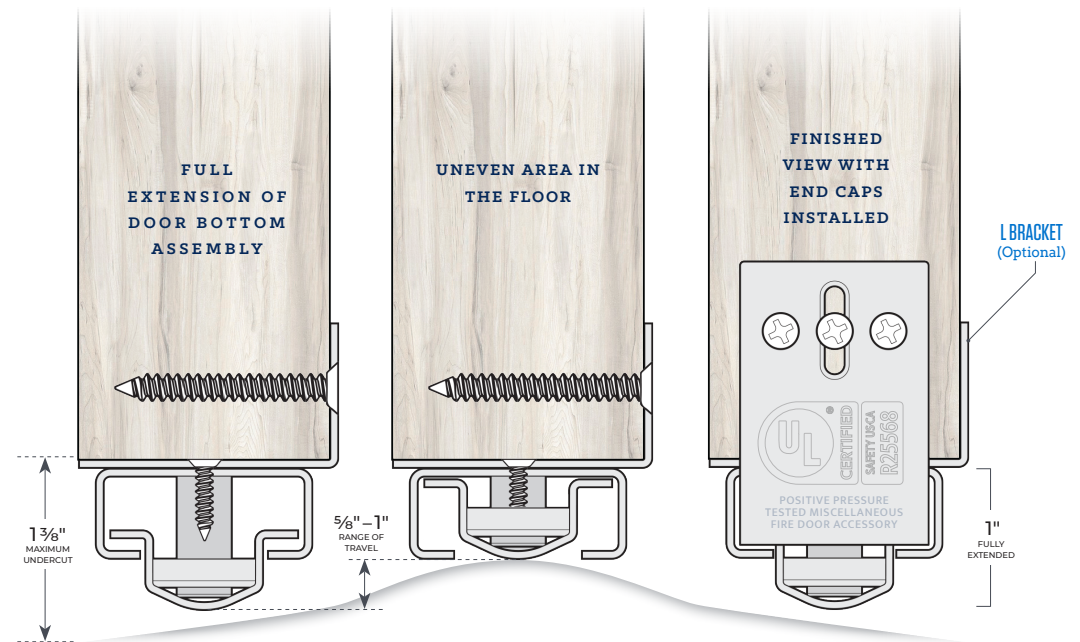

NGP-GAP-9595DKB-PCS-0621-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH