



# 9700

Perimeter Seal Compatible with Parallel Arm Closers

## PRODUCT CUT SHEET

### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane  
Silicone Plus is Tan

- ▶ Premium Grade Seals Specially Formulated to Withstand Greater Temperature Extremes While Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Flexibility and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- ▶ No Break-in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self-Drilling #8 (Tek Type) Screws Furnished
- ▶ May Be Cut to Fit Narrow Frame Stops
- ▶ Specify "Cut to Width" on Order

### Finishes


9700 Mill Aluminum  
9700A Anodized Aluminum  
9700B Gold  
9700DKB Dark Bronze

### Options

FATT - Fast Attach Tape



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

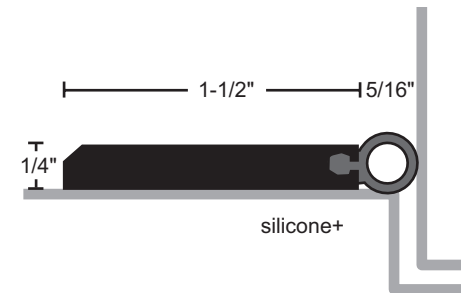

NGP-GKT-9700-PCS-1120-A