



# 9700

Perimeter Seal Compatible with Parallel Arm Closers

## PRODUCT CUT SHEET

### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane  
Silicone Plus is Tan

- ▶ Premium Grade Seals Specially Formulated to withstand Greater Temperature Extremes while Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- ▶ No Break-in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self-Drilling #8 (Tek Type) Screws Furnished
- ▶ May Be Cut to Fit Narrow Frame Stops
- ▶ Specify "Cut to Width" on Order

### Finishes

9700 Mill Aluminum  
9700A Anodized Aluminum  
9700B Gold  
9700DKB Dark Bronze

### Options


FATT - Fast Attach Tape



**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

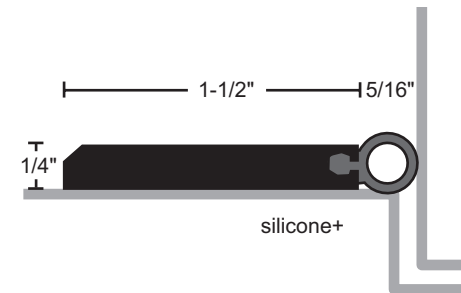

NGP-GKT-9700-PCS-0323-A

**ngp.com**  
1-800-NGP-RUSH