

# AUTOMATIC DOOR BOTTOMS

## SURFACE

All Products on This Page:



- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- 36" and Longer May Be Cut up to 4" in the Field; Under 36" Should Not Be Cut in the Field, Order Net Length
- Minimum Length 11", Maximum Length 60" (Except 780)
- End Caps Furnished Standard. Models 220, 221, 229, 310 Require Door Handing, RH Supplied Standard Units Under 36" NOT Field Reversible. Please Specify Handing.

### 220SA

Anodized Aluminum Automatic Door Bottom with Silicone Seal



PRODUCT# SUFFIX	FINISH
A	Anodized Aluminum
DKB	Dark Bronze
None	Mill Aluminum

## SURFACE

<b>220NA</b>	Black Neoprene (1, 2, 3)
<b>220NDKB</b>	Black Neoprene (1, 2, 3)



<b>220SA</b>	Black Silicone (1, 2, 3)
<b>220SDKB</b>	Black Silicone (1, 2, 3)



<b>220WHA</b>	Black Nylon Brush (2)
<b>220WHDKB</b>	Black Nylon Brush (2)



<b>222NA</b>	Black Neoprene (1, 3)
<b>222NDKB</b>	Black Neoprene (1, 3)



<b>222SA</b>	Black Silicone (1, 3)
<b>222SDKB</b>	Black Silicone (1, 3)



<b>222WHA</b>	Black Nylon Brush (2)
<b>222WHDKB</b>	Black Nylon Brush (2)

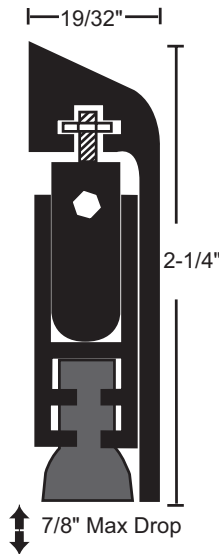

Drop Bar with Nylon Brush - Suffix "WH"



<b>310NA</b>	Black Neoprene (1, 2, 3)
<b>310NDKB</b>	Black Neoprene (1, 2, 3)



<b>310SA</b>	Black Silicone (1, 2, 3)
<b>310SDKB</b>	Black Silicone (1, 2, 3)



<b>310WHA</b>	Black Nylon Brush (2)
<b>310WHDKB</b>	Black Nylon Brush (2)

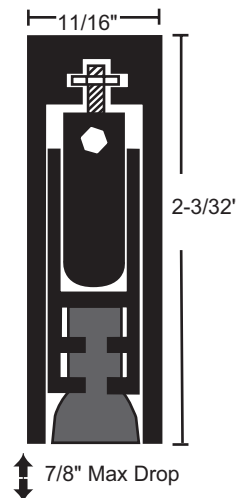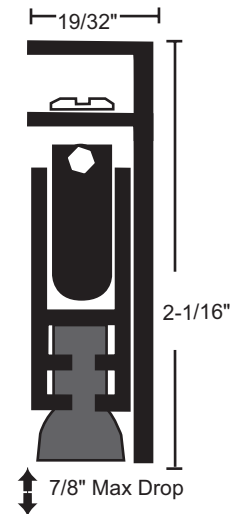

- 1/16" Thick Lead Insert Available - Specify "Lead-Lined".
- Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" NOT Field Reversible. Please Specify Handing.
- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1.