


ALUMINUM RAMPS

All Products On This Page



Illustrations Shown at 50%
Slope = 1:12

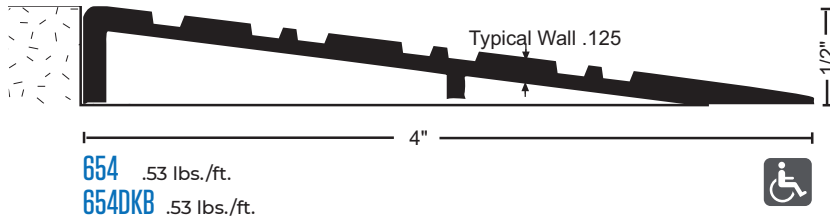

654 .53 lbs./ft.
654DKB .53 lbs./ft.

MATERIALS & FINISHES


- Aluminum Mill
- DKB - Aluminum Dark Bronze



OPTIONAL:

SIA: SLIP-RESISTANT FINISH

For use in Areas Where
Conditions can be Hazardous
and Safety is a Priority.

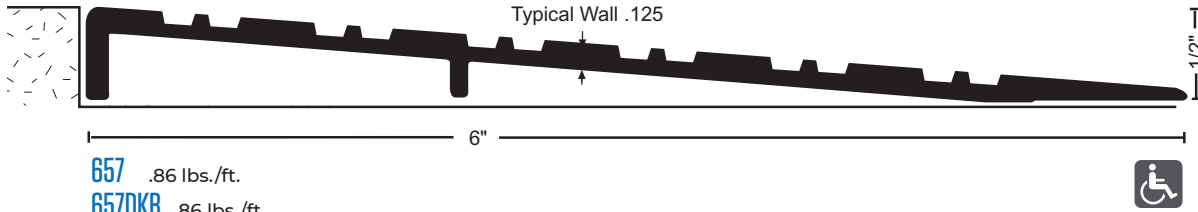


657 .86 lbs./ft.
657DKB .86 lbs./ft.


INTERLOCKING RUBBER RAMPS

- Supplied with Beveled Ends - (End Slope = 1:2).
Specify if Straight Cut is Required.
- Rubber Ramp Sections may be Combined with
Aluminum Ramp Components for Higher Rises, or
with 6" Flat Aluminum Interlocking Threshold #957
for Offset Conditions.
- Black Silicone Adhesive Available to Secure Ramps
without Fasteners. Specify RR5007BL, Each Tube
will Secure 2 Ramps 12" Wide X 36" Long
(6 Square Feet).

Illustrations Shown at 50%
Slope = 1:12

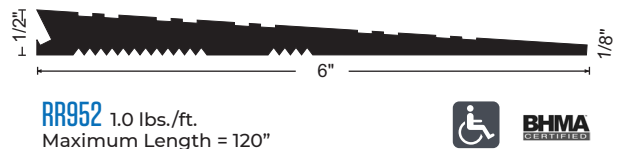

RR952 1.0 lbs./ft.
Maximum Length = 120"

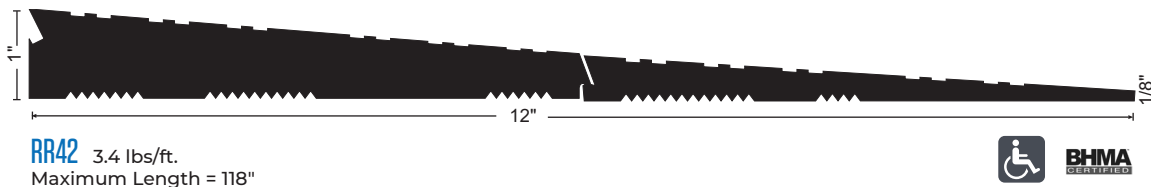

RR42 3.4 lbs./ft.
Maximum Length = 118"