


BUMPER SEAL THRESHOLDS

ADA COMPLIANT


All Products In This Section

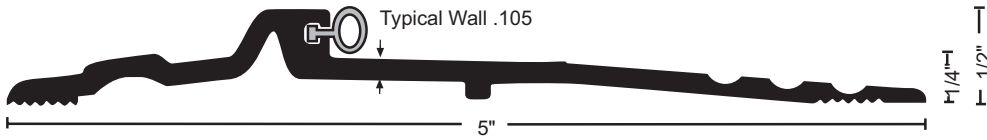

896 .64 lbs./ft.
896DKB .64 lbs./ft.




896V
 ADA Compliant
 Aluminum Bumper
 Threshold, 1/2" x 5" with
 Vinyl Bumper Seal

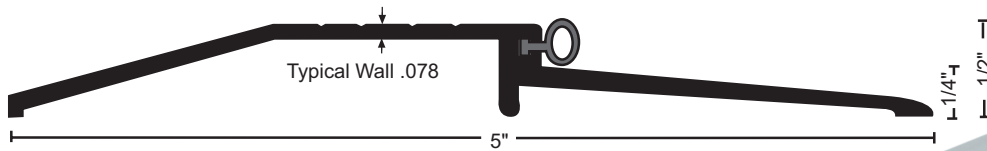


950 .50 lbs./ft.
950DKB .50 lbs./ft.

Excellent for use with
 Automatic Door Bottoms

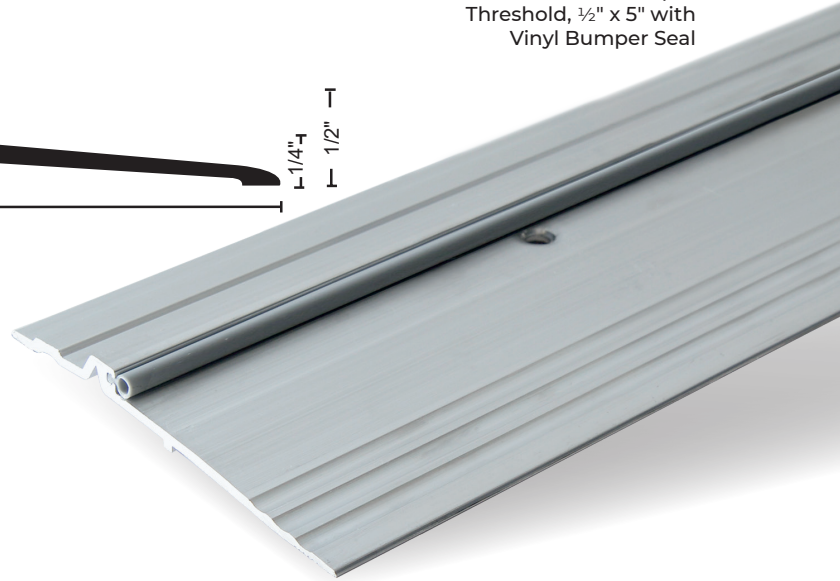


STOP STRIPS

All Products In This Section



2 .16 lbs./ft.
2DKB .16 lbs./ft.


#6 Self-Tapping Machine
 Screw Provided

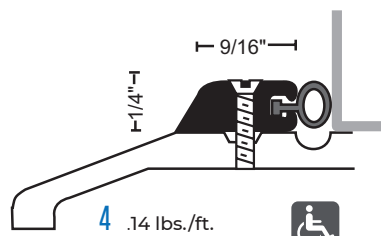

4 .14 lbs./ft.
4DKB .14 lbs./ft.



#6 Self-Tapping Machine
 Screw Provided

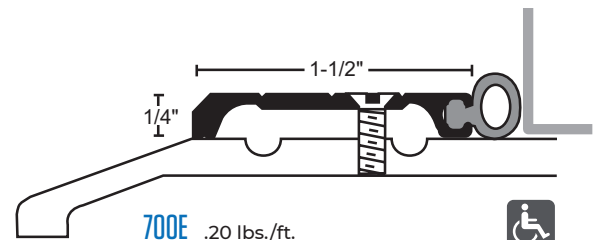

700E .20 lbs./ft.
700EDKB .20 lbs./ft.



#10 Self-Tapping Machine Screw
 Provided

MATERIALS & FINISHES

- Aluminum Mill
- DKB - Aluminum Dark Bronze



OPTIONAL: SIA: SLIP-RESISTANT FINISH

For use in Areas Where
 Conditions can be
 Hazardous and Safety
 is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated
 Wood Screws Furnished. Dark
 Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door
 Providing Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** NGP-TPV
- S** Silicone

**Vinyl ("V") Supplied Unless Other
 Material Specified