


# FireLite® NT

## FIRE-PROTECTIVE SAFETY GLASS CERAMIC

- ▶ 3/16" (5mm) Thick Glass Ceramic
- ▶ Fire-Rated Surface Applied Safety Film
- ▶ Neutral Coloration - Clear and Wireless
- ▶ ultraHD® Technology for Improved Surface Quality, Clarity and Color
- ▶ Etched With UL Classification on Each Piece
- ▶ 3-Year Manufacturer Warranty
- ▶ Weight: 2.56 Lbs./Sq. Ft.
- ▶ STC 35

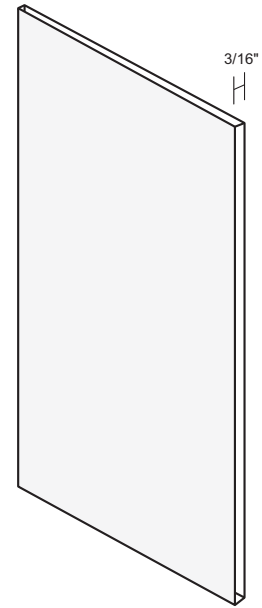

### Fire-Rating Information

- ▶ Certified by UL to ANSI/UL 9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106 With Closed Cell PVC Foam Glazing Tape Like NGP L-GT-116, L-GT-118, or L-GT-132
- ▶ IBC Applicable Edition May Limit Maximum Size Allowable

Rating	Application	Max. Visible Glass Area (Sq. Inches)	Max. Width Visible Glass	Max. Height Visible Glass
20, 45, 60 Minute	Doors* (Non-Temp Rise)	3,204	36"	89"
20, 45, 60 Minute	Side-Lites, Borrowed Lites, Transom Lites	3,325	95"	95"
90 Minute	Doors* (Non-Temp Rise)	1,393	36"	56 1/2"
90 Minute	Side-Lites, Borrowed Lites, Transom Lites	1,393	56 1/2"	56 1/2"
180 Minute	Doors* Including Temp-Rise	100	12"	33"

\*With Fire-Rated Glass Lite Kit

### Impact Safety Rating Information

Meets ANSI Z97.1, Class A

Meets CPSC 16CFR 1201 (Category I and II)

Complies With IBC Requirements for Use in Doors, Side-Lites, Transom Lites and Borrowed Lites