

FLDL-SG2

FIRE-RATED FUSIBLE LINK LOUVER

Anemostat
DOOR PRODUCTS




*Up to 90 Minutes

FOR 1 3/4" THICK DOORS UP TO 90 MINUTES

- ▶ Blades Close When Activated By Fire/Heat
- ▶ 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- ▶ 12 Ga. Cold Rolled Steel Security Grille Both Sides
- ▶ Stainless Steel Spring
- ▶ 165° Fusible Link
- ▶ #8 x 1" Torx Security Pin Screws
- ▶ Free Area 40%
- ▶ Gray Primer (GPZ) Powder Coat Finish
- ▶ Available in Whole Inch Increments:
Minimum size: 10" x 6"
Maximum size: 24" x 30"

Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- ▶ Galvanneal - A40 Blades (Security Grilles Not Available in Galvanneal)

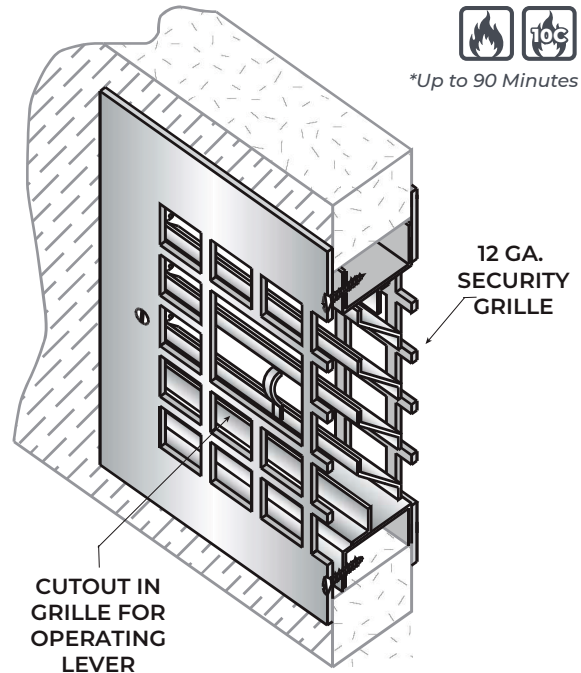


12 GA. C.R.S. TWO SIDES FRAME/ SECURITY GRILLE FACE PLATE W/ 13/16" SQ HOLES ON 1" CTRS.

165°F (74°C) FUSIBLE LINK & HEAT SLOT AT TOP

SPRING CLIP

OPERATING LEVER

INSIDE

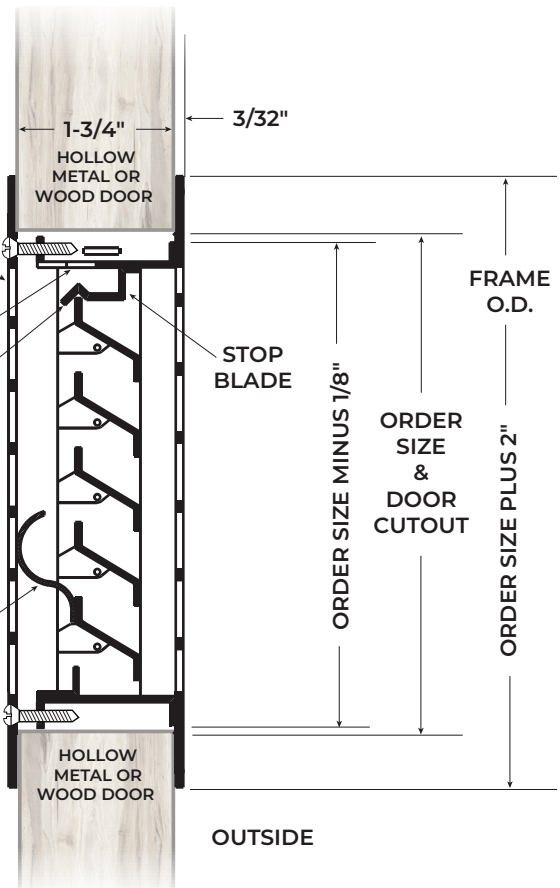

Not To Scale