



FireLite[®] NT

Fire-Protective Ceramic Safety Glass

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material


- ▶ 3/16" (5mm) Thick Glass Ceramic
- ▶ Fire-Rated Surface Applied Safety Film
- ▶ Neutral Coloration - Clear and Wireless
- ▶ ultraHD[®] Technology for Improved Surface Quality, Clarity and Color
- ▶ Etched With UL Classification on Each Piece
- ▶ 3-year Manufacturer Warranty
- ▶ Weight: 2.56 Lbs./Sq. Ft.
- ▶ STC 35 Rating

Fire-Rating Information

- ▶ Certified by UL to ANSI/UL 9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106 With Closed Cell PVC Foam Glazing Tape Like NGP L-GT-116, L-GT-118, L-GT-132
- ▶ IBC Applicable Edition May Limit Maximum Size Allowable

Impact Safety Rating Information

Meets ANSI Z97.1, Class A
 Meets CPSC 16CFR 1201 (Category I and II)
 Complies With IBC Requirements for Use in Doors, Side-Lites, Transom Lites and Borrowed Lites

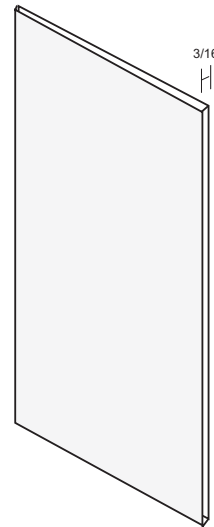

RATING	APPLICATION	MAX. VISIBLE GLASS AREA (SQ. INCHES)	MAX. WIDTH VISIBLE GLASS	MAX. HEIGHT VISIBLE GLASS
20, 45, 60 MINUTE	DOORS* (NON-TEMP RISE)	3,204	36"	89"
20, 45, 60 MINUTE	SIDE-LITES, BORROWED LITES, TRANSOM LITES	3,325	95"	95"
180 MINUTE	DOORS* INCLUDING TEMP-RISE	100	12"	33"

*With Fire-Rated Glass Lite Kit

NGP-GLA-FIRELITENT-PCS-0325-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH