



# GAP90-ME

## Meeting Edge Gap Solution

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### UL Certified Solution for Fire Doors With Excessive Clearance Between the Meeting Edges of a Pair of Doors, up to 3/8".



- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90-Minute
- Patent Pending
- Non-Handed
- Certified for Use on Door with Surface/Concealed Vertical Rod Exit Devices or Manual/Automatic Flush Bolts *(see Installation Instructions)*
- Can be Installed with the Door on the Hinges
- Can be Field-modified to Match-Fit Varying Width Gap Along Height of the Door *(see installation instructions)*

#### PRODUCT CONSISTS OF:

- + Formed Metal Edge, 20-Gauge Steel, Embossed with UL Mark
- + Hardware Pack: #10 x 3/4" FHPH SS TEK  
#10 x 2 1/2" FHPH SS SMS
- GapGuard™ Fire Caulk *(see Installation Instructions)*
- Sizes: 84" and 96"


#### FINISH:

Primer Gray, Powder Coat



**SPECIAL NOTES:**

- 90-minute rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C wood or hollow metal fire doors
- An NGP Strike Shim 9275 or 9225 may also be required for proper latchbolt engagement
- Certified for on-site modifications around strike location
- If fire pins are used, it is recommended to apply metal edge to door with fire pin receiver, ensuring receiver is flush with metal edge
- To retain UL Certification, the Gap90-ME must be installed using GapGuard™ Fire Caulk

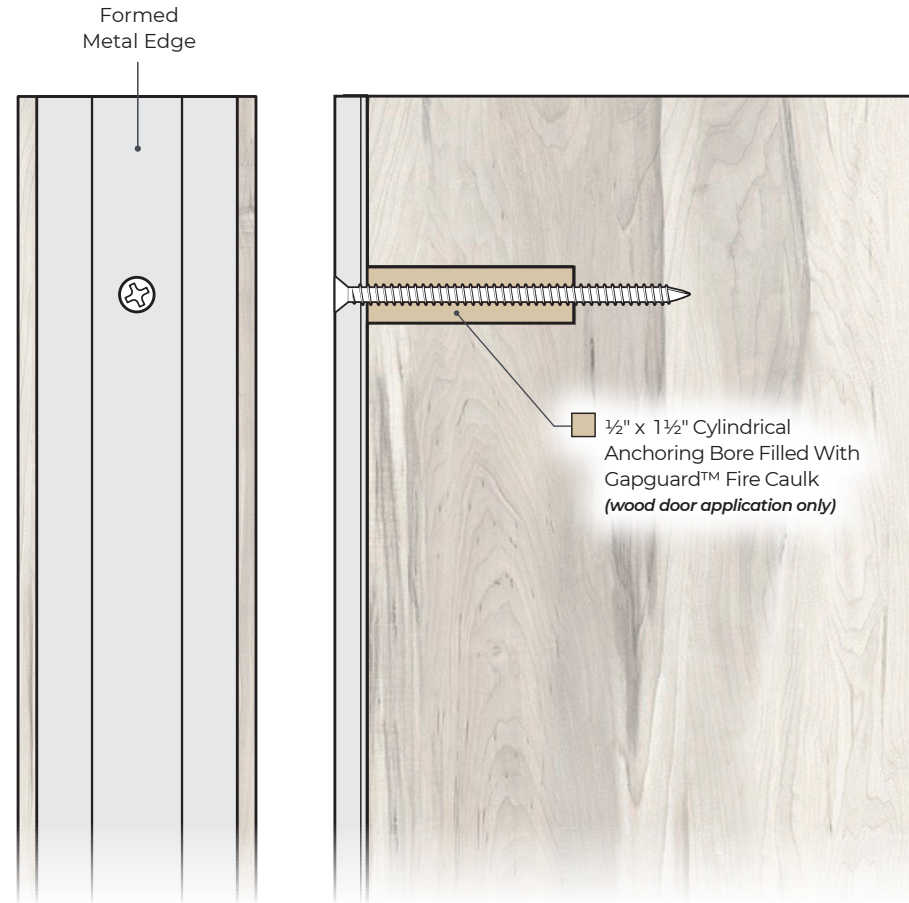

NGP-GAP-GAP90-ME-PCS-0621-A

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
orders@ngp.com

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
vegasorders@ngp.com

**ngp.com**  
1-800-NGP-RUSH