



# GAP90N

Fire Door Head/Jamb Gap Solutions— Up To 90 Minutes

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

**UL Certified for Head/Jamb Gaps**  
— Measuring Over 1/8", and up to 5/16".



- ▶ POSITIVE PRESSURE – CERTIFIED by UL to ANSI/UL10C, Complies with IBC, NFPA 80 and NFPA 252 for Application to Hollow Metal and Wood Fire Doors Rated up to 90 Minute with Excessive Door and Frame Clearances, Measuring up to 5/16"
- ▶ Restricts the Passage of Smoke
- ▶ Non-Handed
- ▶ Available in 36", 48", 84" and 96" Lengths
- ▶ Designed for Use Where Door Frame Stop is Less Than 1 3/8" Wide
- ▶ An NGP Strike Shim (9275 or 9225) may also be Required for Proper Latchbolt Engagement

### GAP90N

Requires Installation of ALL Components:  
9945N, 9400, 5075CL


### GAP90NDKB

Requires Installation of ALL Components:  
9945N, 9400DKB, 5075B

### GAP90NW


Requires Installation of ALL Components:  
9945N, 9400W, 5075W

### 9945N Narrow Steel Stop Extender

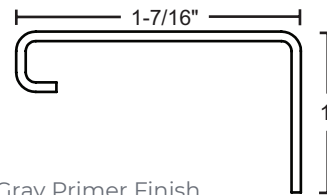


- ▶ 16-Gauge, Gray Primer Finish
- ▶ Furnished With #10 X 1" TEK SMS
- ▶ Patent No.: US9,273,510B2

### 5075 Self-Adhesive TPE Seal





\*Anti-Microbial not available in clear

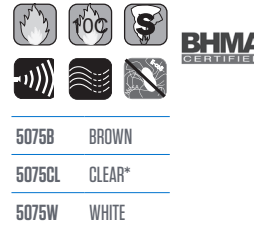

### 9400 NGP-Edge® Intumescent Seal With PVC Cover

- ▶ Self-Adhesive

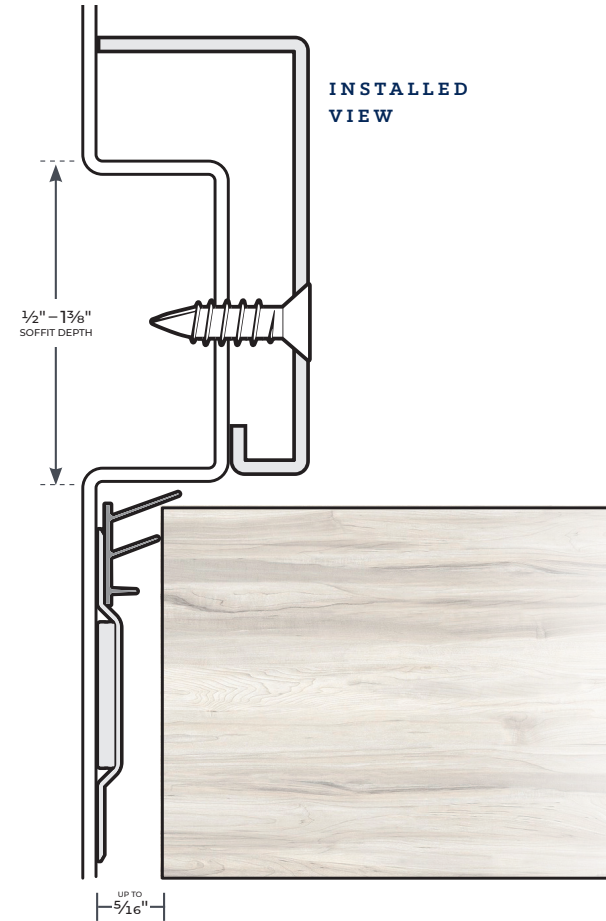

NGP-GAP-GAP90N-PCS-0422-A

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
orders@ngp.com

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
vegasorders@ngp.com

**ngp.com**  
1-800-NGP-RUSH