



9200

Gap Solution for Excessive Fire Door & Frame Clearances — up to 45 Minutes

PRODUCT CUT SHEET


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Self-Adhesive Intumescent

- ▶ UL Certified Miscellaneous Fire Door Accessory for Excessive Door and Frame Clearances, Measuring up to $\frac{3}{8}$ "
- ▶ For Use on 20 and 45 Minute Rated UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ An NGP Strike Shim 9275 or 9225 is also Required for Proper Latchbolt Engagement
- ▶ NGP Intumescent Materials are Formulated to Expand at 275°F up to 20 Times Their Original Thickness; Completely Sealing the Gap Around and Between Doors During a Fire
- ▶ Modified Acrylic Pressure-Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long-Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol, and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long-Term Exposure -30°F up to 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ▶ Sold by the Foot: 3' Minimum to 490' Reel

FINISH:

9200GR Gray
 9200C Charcoal

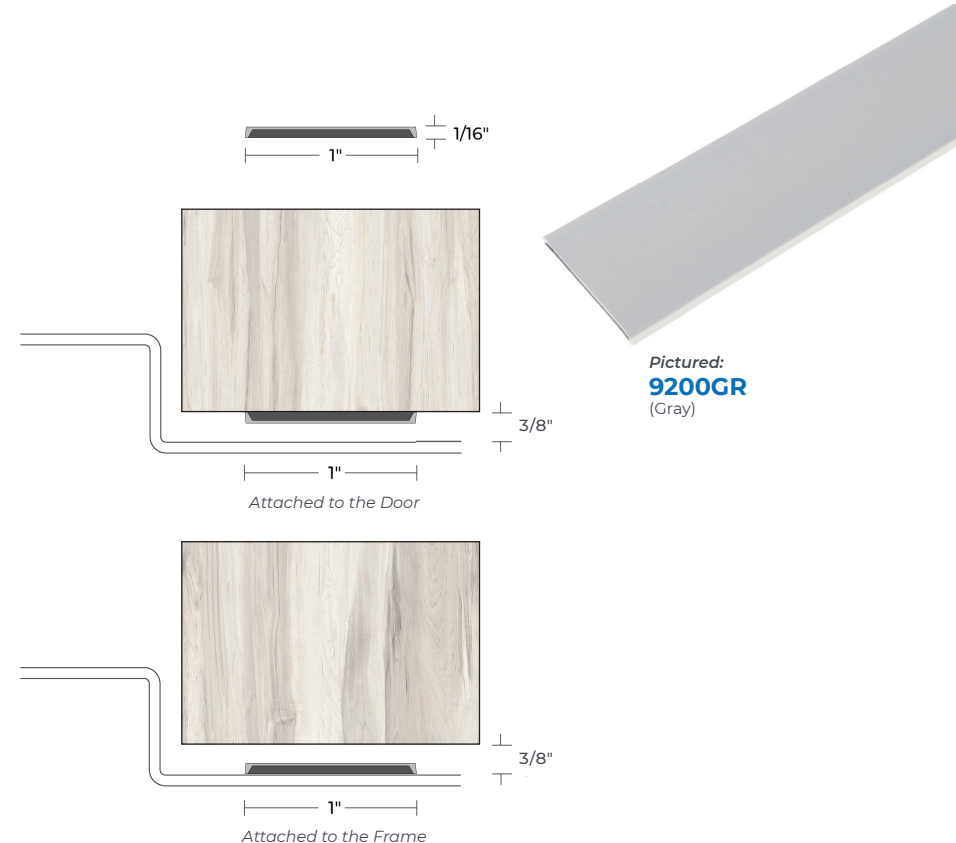

NGP-GAP-9200-PCS-0125-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH