

GAP90™


FIRE DOOR HEAD AND JAMB GAP SOLUTION



UL CERTIFIED FOR USE IN
THE US AND CANADA

UL Certified Solution for Fire Doors with Excessive
Clearance Between Door and Frame Over $\frac{1}{8}$ ", up to $\frac{3}{8}$ ".

INSTALLED
VIEW

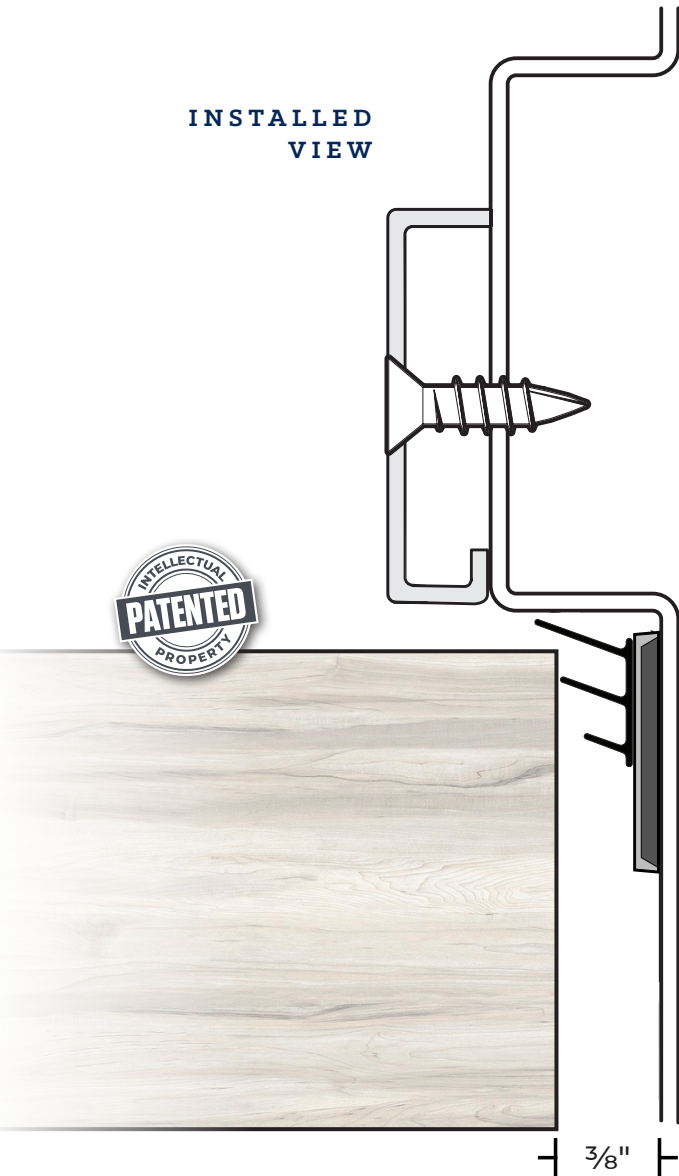

PRODUCT CONSISTS OF:

9945

Steel Stop Extender

- ◆ 16-Gauge, Gray Primer Finish
- ◆ Furnished with #10 X 1" TEK SMS
- ◆ Embossed with **UL Mark**
- ◆ Patented: US Patent 9,273,510 B2

5075

Self-Adhesive Silicone Seal

5075C CHARCOAL

5075CL CLEAR

9400

NGP-Edge® Intumescent
Seal with PVC Cover

9400GR GRAY

9400C CHARCOAL



POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY

90-Minute Rated UL Certified Miscellaneous Fire Door Accessory
on UL10B and UL10C Wood or Hollow Metal Fire Doors.

An NGP Strike Shim 9275 or 9225 may also be Required for
Proper Latchbolt Engagement.

Doors with Parallel Arm Closers — Use 9990 Fire Door Top
Gap Solution.

GAP90™ INCLUDES 9945, 9400GR, 5075CL

GAP90DKB™ INCLUDES 9945, 9400C, 5075C

Available in 36", 48", 84" and 96" Lengths