

## Acoustical Door Shoe


Aluminum alloy 6063, T5 temper  
Thermoplastic polymer: Polyvinyl Chloride formulated with an environmentally friendly Bio-based plasticizer

- Economical
- Flame resistant
- Moisture resistant
- Temperature range 0°F to 140°F
- Oxidative degradation from age and exposure to cold, heat and UV causes hardening, loss of memory and resilience, cracking, crazing and discoloration
- #6 x 3/4" stainless steel SMS furnished
- Screw holes slotted for adjustment



**MATERIALS & FINISHES**  
no suffix - mill aluminum  
DKB - dark bronze

vinyl is gray

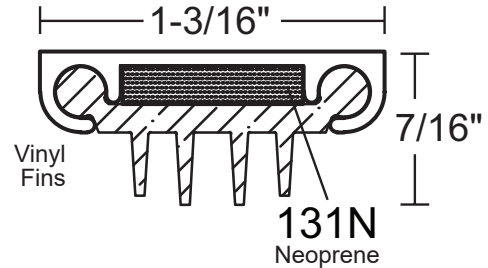

312V X 131N  
312VDKB X 131N



## STC Rated Acoustical Foam Pad

Foam seal self adhesive

- Helps acoustics and seals at corner gap
- Apply to jambs on hinge and strike side
- Available as set of 2 pads
- Color is black

60FP



STC 52

