

HP90-CYL

CYLINDRICAL HARDWARE PREP FILLER



UL Certified Solution for Fire Doors When Either Removing Existing Hardware and/or Using a New Hardware Type Over Existing Hardware Prep's.

- ▶ Application Certified on both Hollow Metal and Wood Fire Rated Doors, up to 90 Minutes
- ▶ Patent Pending
- ▶ Certified for Filling Cylindrical Lockset Cavities

PRODUCT CONSISTS OF:


- + Fire-Rated Panels:
 - HP90 – 2.0
 - HP90 – 1.0
 - HP90 – 0.5
- + Steel Filler Plates, powder coated, primer gray, embossed with UL Mark
 - HP90-RDCP, Filler Plate
 - HP90-CEF1000, Edge Filler Plate
 - HP90-SF2750, Strike Filler Plate
 - HP90-SF4875, Strike Filler Plate
- + Hardware Pack
 - #10-32 x 1 3/4" FHPH SS machine screw
 - #8 x 3/4" FHPH SS combo screw
 - #12 x 1" FHPH SS combo screw
 - #8 x 3/4" FHPH SS SMS
 - #12 x 1" FHPH SS SMS
- + GapGuard™ Fire Caulk
(see Installation Instructions)

WOOD DOOR: INSTALLED VIEW



■ GapGuard™ Fire Caulk Fill

STEEL DOOR: INSTALLED VIEW

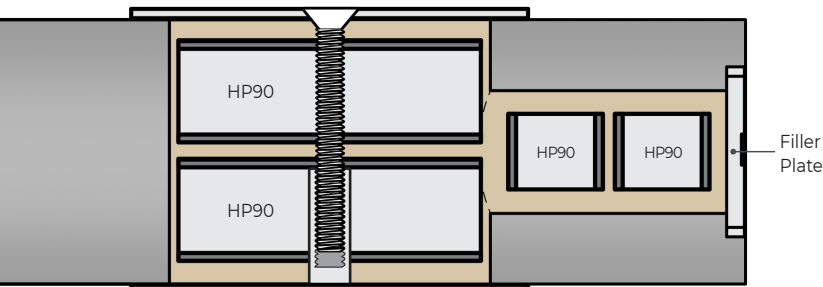

■ GapGuard™ Fire Caulk Fill



SPECIAL NOTES:

- 90-minute rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C wood or hollow metal fire doors
- To retain UL Certification, the HP90-MORT must be installed using GapGuard™ Fire Caulk