



# L-1900, FLDL

Fire-Rated Fusible Link Louver

## PRODUCT CUT SHEET


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

### For 1 3/4" Thick Doors Up To 90 Minutes

- Blades Close When Activated by Fire/Heat
- 18 Ga. Cold Rolled Steel Frame
- 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- Mitered Corners Secured with Reinforcing Clips
- Stainless Steel Spring
- 165° Fusible Link
- #8 x 3/4" Phillips Head SMS
- Free Area 40%
- Gray Primer (GPZ) Powder Coat Finish

#### Available Options

- Powder Coat Color Options - See Color Chart on [www.ngp.com](http://www.ngp.com)
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- Torx Security Screws
- Galvanneal - A40 Steel
- Type 304 Stainless Steel – Specify FLDL-SS
- Type 316 Stainless Steel – Specify FLDL-316SS

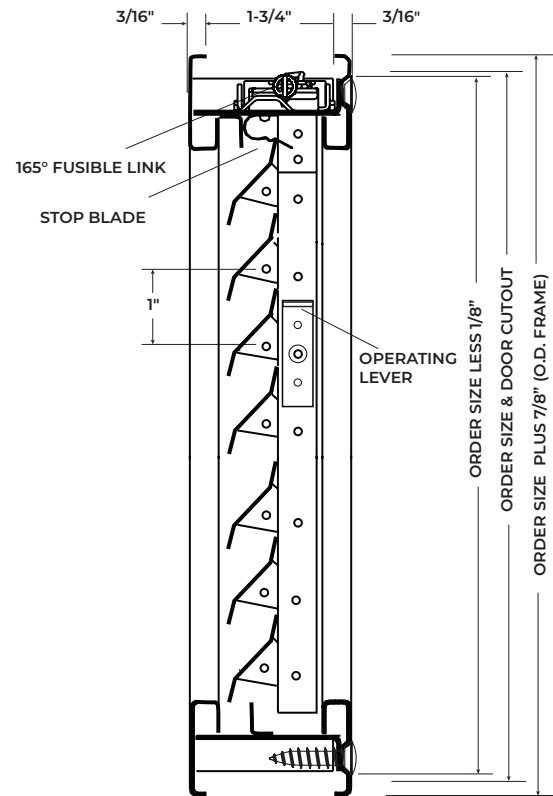


Undersized 1/8" for Clearance  
Not to Scale



**Size Information:**  
Available in Whole Inch Increments  
Minimum size: 10" x 6"  
Maximum size: 24" x 30"



\*up to  
90 minutes



**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

NGP-LIT-L-1900-PCS-0822-A

**ngp.com**  
1-800-NGP-RUSH