

# L-1900, FLDL

## FIRE-RATED FUSIBLE LINK LOUVER



\*up to 90 minutes

### FOR 1 3/4" THICK DOORS UP TO 90 MINUTES

- Blades Close When Activated By Fire/Heat
- 18 Ga. Cold Rolled Steel Frame
- 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- Mitered Corners Secured With Reinforcing Clips
- Stainless Steel Spring
- 165° Fusible Link
- #8 X 3/4" Phillips Head SMS
- Free Area 40%
- Gray Primer (GPZ) Powder Coat Finish

#### Available Options


- Powder Coat Color Options - See Page L3
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- Torx Security Screws
- Galvanneal - A40 Steel
- Type 304 Stainless Steel – Specify FLDL-SS
- Type 316 Stainless Steel – Specify FLDL-316SS

#### Size Information:

Available in Whole Inch Increments


Minimum size: 10" x 6"

Maximum size: 24" x 30"

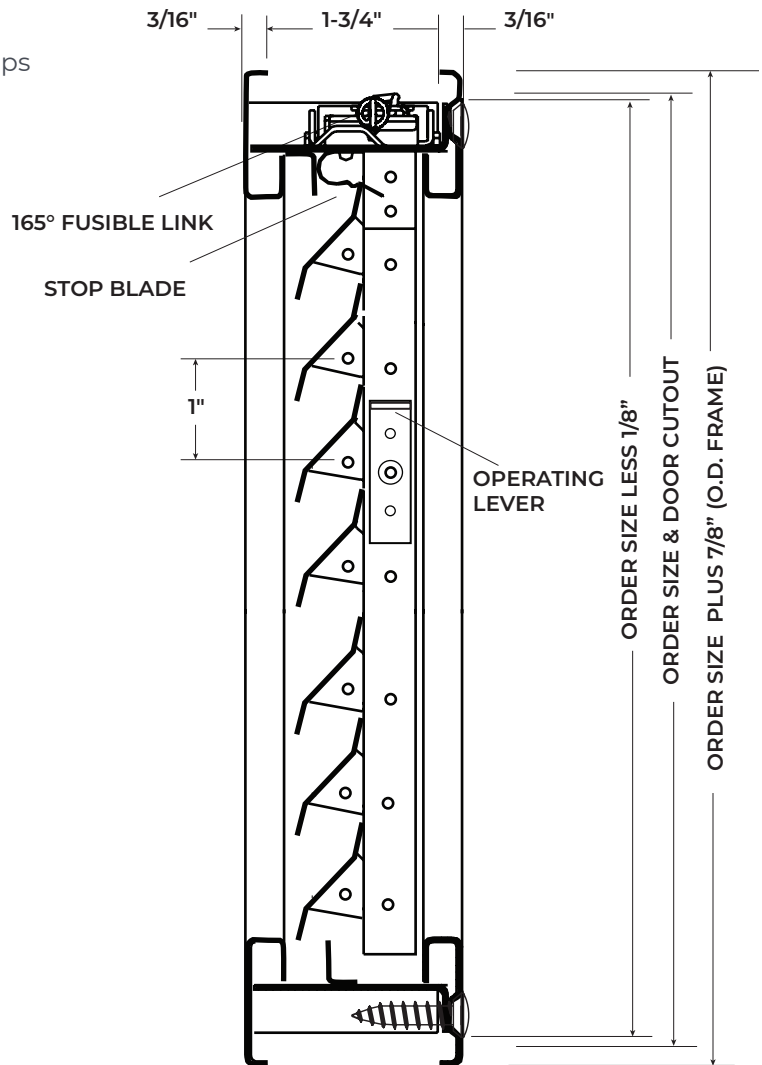

Undersized 1/8" for Clearance

Not to Scale



Top View Fusible Link Mechanism