


L-FRA100 STC & L-FRA100-SP STC

LOW PROFILE SOUND-RATED LITE KIT OPTION - SUFFIX "STC"

SILICONE ACOUSTICAL SEAL APPLIED TO REDUCE SOUND TRANSMISSION

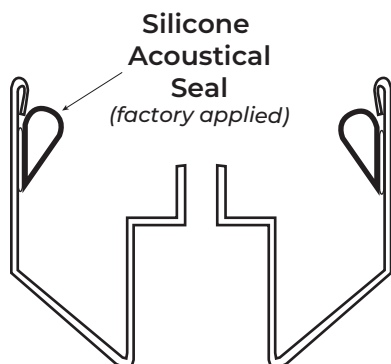

Acoustical Testing performed at Intertek Testing, Inc. to:

ASTM E 90 Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

ASTM E 413 Classification for Rating Sound Insulation.

ASTM E 1332 Standard Classification for Rating Outdoor-Indoor Sound Attenuation.

ASTM E 2235 Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods.

STC Ratings:

Protect3™	STC 28
TEMP20™	STC 28
Wired	STC 28
Polycarbonate ¼"	STC 29
Pyran® Platinum F	STC 31
Tempered ¼"	STC 31
Polycarbonate ½"	STC 34
Insulated Tempered 1"	STC 35
Laminated ¼"	STC 35
Pyran® Platinum L	STC 36
Insulated Laminated 1"	STC42