



# L-FRA100

Low Profile Lite Kit


## PRODUCT CUT SHEET

For 1 3/4" Thick Doors and 3/16", 1/4" or 5/16" Glass

- ▶ 18 Ga. Cold Rolled Steel
- ▶ Mitered and Welded Corners
- ▶ Welded Reinforcing Clips at Corners
- ▶ Counter-Sunk Mounting Screw-Holes
- ▶ #8 x 1 3/4" Phillips Head SMS
- ▶ Available in Uneven and Fractional Sizes
- ▶ Gray Primer (GPZ) Powder Coat Finish

### Available Options

- ▶ Powder Coat Color Options - See Color Chart on [ngp.com](http://ngp.com)
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel
- ▶ Zinc Electro-Plating
- ▶ Glass & Glazing Tape
- ▶ Lead Lining - 3/16" Thick

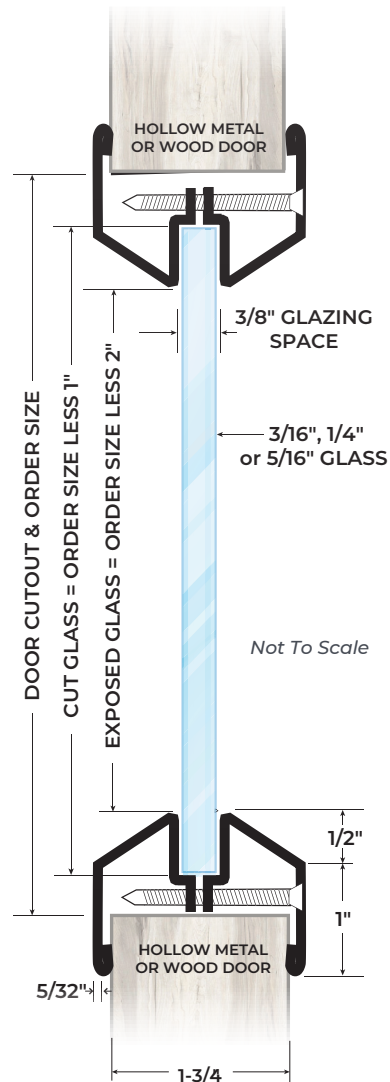

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 3/16".

NGP-LIT-L-FRA100-PCS-0323-C

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

**ngp.com**  
1-800-NGP-RUSH




# Tempered Glass

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

### Material

- ▶ Impact Safety-Rated: Complies with IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- ▶ 1/4" Thick Clear Heat Treated Glass
- ▶ Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- ▶ Breaks Into Small Harmless Fragments
- ▶ Can NOT Be Cut After Manufacturing
- ▶ 11" Minimum Height.
- ▶ Manufactured in USA
- ▶ NOT Fire-Rated.
- ▶ STC 31 Rating

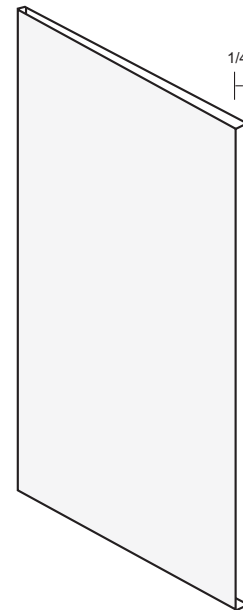

NGP-GLA-TEMPERED-PCS-0223-A

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

**ngp.com**  
1-800-NGP-RUSH



# Glazing Tape

Closed Cell PVC Foam

## PRODUCT CUT SHEET

L-GT-114 – 3/8" Wide x 1/4" Thick - 50' Rolls

L-GT-116 – 3/8" Wide x 1/16" Thick - 200' Rolls

L-GT-118 – 3/8" Wide x 1/8" Thick - 100' Rolls

L-GT-132 – 3/8" Wide x 1/32" Thick - 200' Rolls

L-GT-316 – 3/8" Wide x 3/16" Thick - 50' Rolls


### Material

Closed Cell PVC Foam Glazing Tape with Adhesive Both Sides  
Color is black

For Use in Lite Kits on UL10C Positive-Pressure Fire-Rated Wood or Steel Doors Rated Up To:

- ▶ 20 Minutes with TEMP20™ or Fire-Protective Wired Glass
- ▶ 90 Minutes with Protect3™
- ▶ 180 Minutes with Pyran® Platinum F or Pyran® Platinum L

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



NGP-GLA-L-GT-114-116-118-132-PCS-0223-A

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
orders@ngp.com

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
vegasorders@ngp.com

**ngp.com**  
1-800-NGP-RUSH