# L-GLF100-SP

## SQUARE PROFILE LITE KIT

### FOR VARIABLE DOOR AND/OR GLASS THICKNESS

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Minimum 3" Width or Height
  Maximum 88" Width or Height
- #6 Phillips Truss Head SMS
- Gray Primer (GPZ) Powder Coat Finish

**Required Information**

- Specify Glass Thickness on Order
- Specify Door Thickness on Order if Other Than 1¾"

**Available Options**

- Powder Coat Color Options - See Page L3
- False Mullion Bars - See Page L13
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape - See Glass Section
- Lead Lining - 1/16" Thick

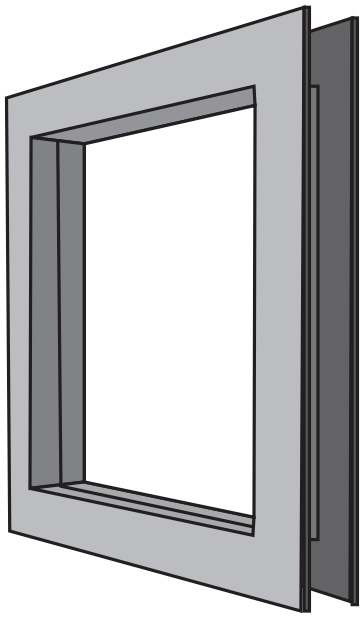

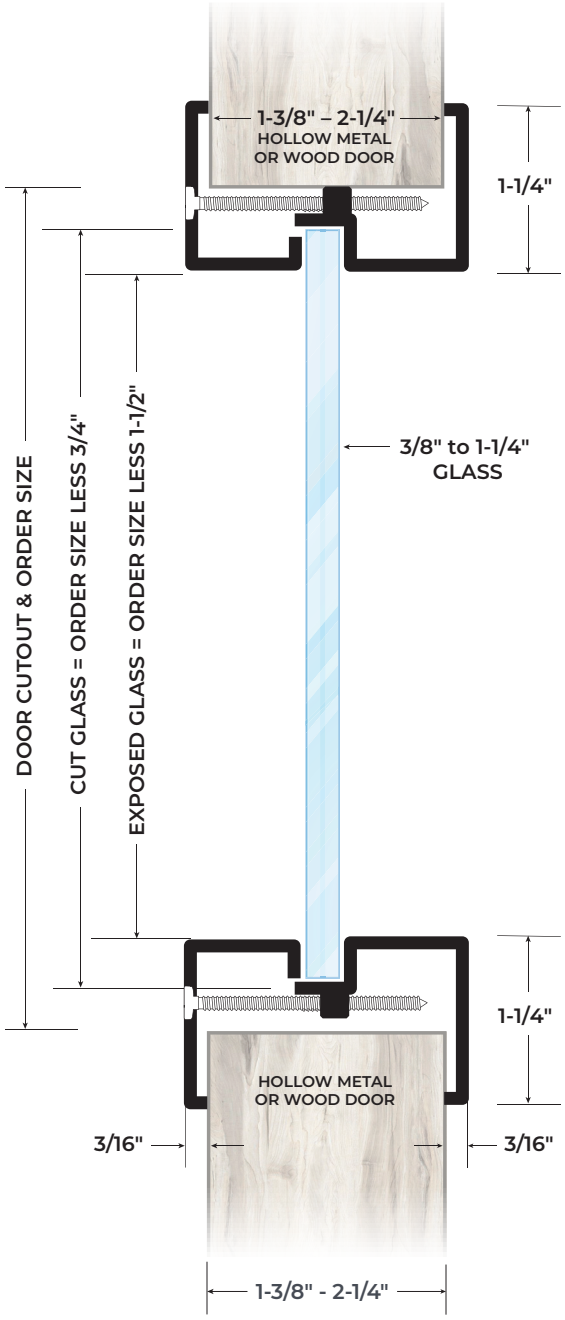


*Not To Scale*

*Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".*

# L-GLF100-SP AND L-GLF100-SP-TB

## GLASS AND DOOR COMBINATIONS

- Details Shown are for 1¾" Door Thickness
- Only Configurations Shown are Available
- Thru-Bolts Available for 1¾" Thick Doors Only

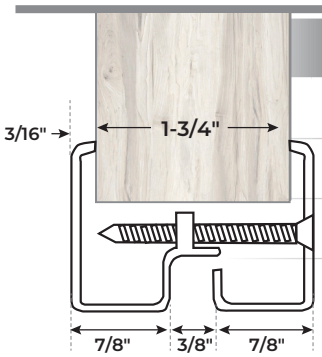


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 2" | 1/4" | GT-114 |
| 2" | 7/16" | GT-118 |
| 2" | 1/2" | GT-118 |

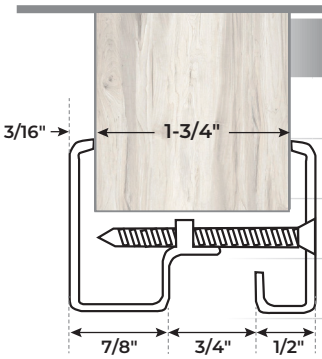


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 1-3/4" | 3/8" | GT-114 |
| 1-3/4" | 1/2" | GT-316 |
| 1-3/4" | 9/16" | GT-118 |
| 1-3/4" | 5/8" | GT-118 |
| 1-3/8" | 1/4" | GT-118 |
| 2" | 7/8" | GT-118 |
| 2-1/4" | 1" | GT-316 |

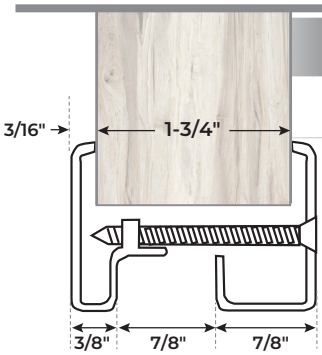


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 1-3/4" | 3/4" | GT-118 |

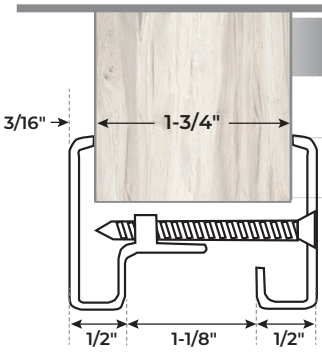


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 1-3/4" | 1" | GT-118 |
| 1" | 1/4" | GT-118 |

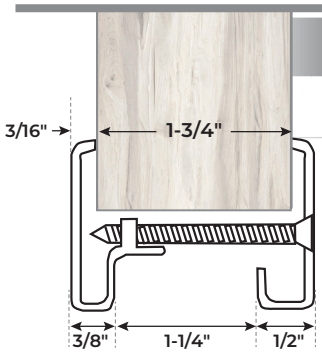


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 1-3/4" | 1-1/8" | GT-118 |

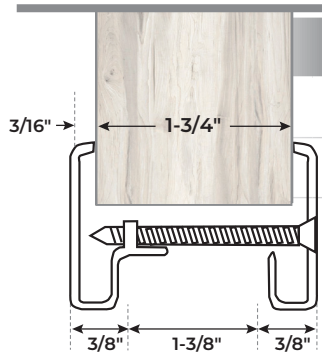


| DOOR | GLASS | GL. TAPE |
|---|---|---|
| 1-3/4" | 1-1/4" | GT-118 |
| 1" | 1/2" | GT-118 |